


WAAS CH 40328 W25A	APP CRS 251°	Rwy Ldg TDZE 781 Apt Elev 781
--	------------------------	---

RNAV (GPS) RWY 25
ROCHELLE MUNI/KORITZ FLD (RPJ)

⚠ Baro-VNAV NA when using Chicago/Rockford Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Chicago/Rockford Intl altimeter setting: increase LPV DA to 1079 feet and LNAV/VNAV DA to 1152 feet and all MDA 60 feet; increase LNAV/VNAV visibility all Cats and LNAV Cat C/D visibility ½ mile; increase Circling Cat C visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA. VDP NA when using Chicago/Rockford Intl altimeter setting.

MISSED APPROACH:
Climb to 2600 direct
BATBE and hold.

AWOS-3 125.2	ROCKFORD APP CON 126.0 327.0	UNICOM 122.975 (CTAF) 0
------------------------	--	-----------------------------------

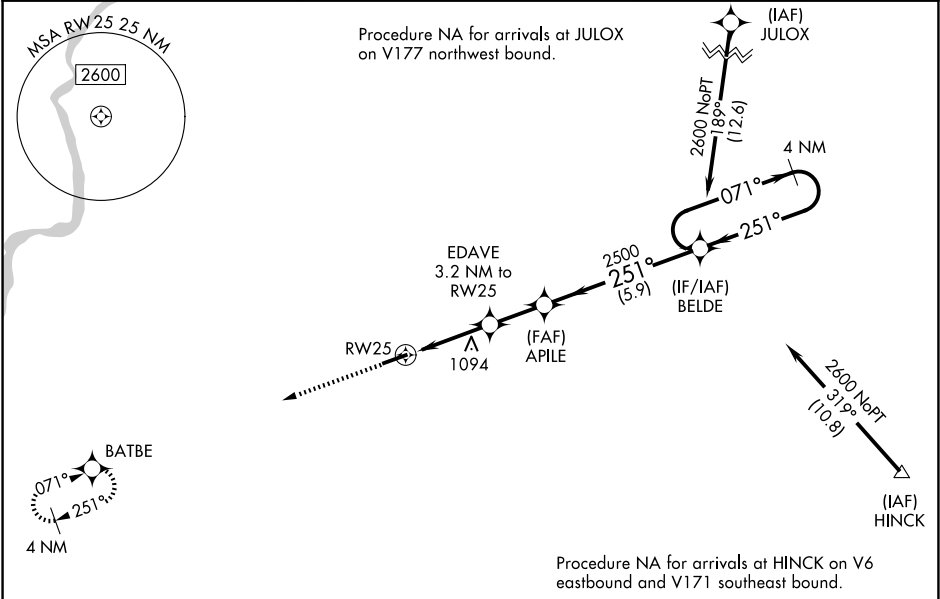

ELEV 781	TDZE 781
-----------------	-----------------

2600 BATBE

VGSI and RNAV glidepath not coincident (VGSI Angle 4.00/TCH 28).

4 NM Holding Pattern

*LNAV only

EDAVE 3.2 NM to RW25

APILE 2500

BELDE

251°

071°

2600

GP 3.00° TCH 40

1.3 NM 1.9 NM 2.1 NM 5.9 NM

CATEGORY	A	B	C	D
LPV DA	1031-1 250 (300-1)			
LNAV/VNAV DA	1104-1½ 323 (400-1½)			
LNAV MDA	1360-1	579 (600-1)	1360-1½ 579 (600-1½)	
CIRCLING	1360-1	579 (600-1)	1680-2¾ 899 (900-2¾)	1820-3 1039 (1100-3)

EC-3, 06 AUG 2026 to 03 SEP 2026

EC-3, 06 AUG 2026 to 03 SEP 2026