

WAAS CH 4000B W17B	APP CRS 176°	Rwy Ldg TDZE Apt Elev	8500 545 607
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17L

DALLAS-FORT WORTH INTL (DFW)


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 17C/R and Rwy 18L/R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSIF-2

MISSED APPROACH: Climb to 1020 then climbing left turn to 3000 direct TACKE and hold.

D-ATIS 123.775	LONE STAR APP CON 119.4	DFW TOWER 126.55 127.5 (E) 124.15 134.9 (W)	GND CON 121.65 121.8 (E) 121.85 (W)
--------------------------	-----------------------------------	---	---

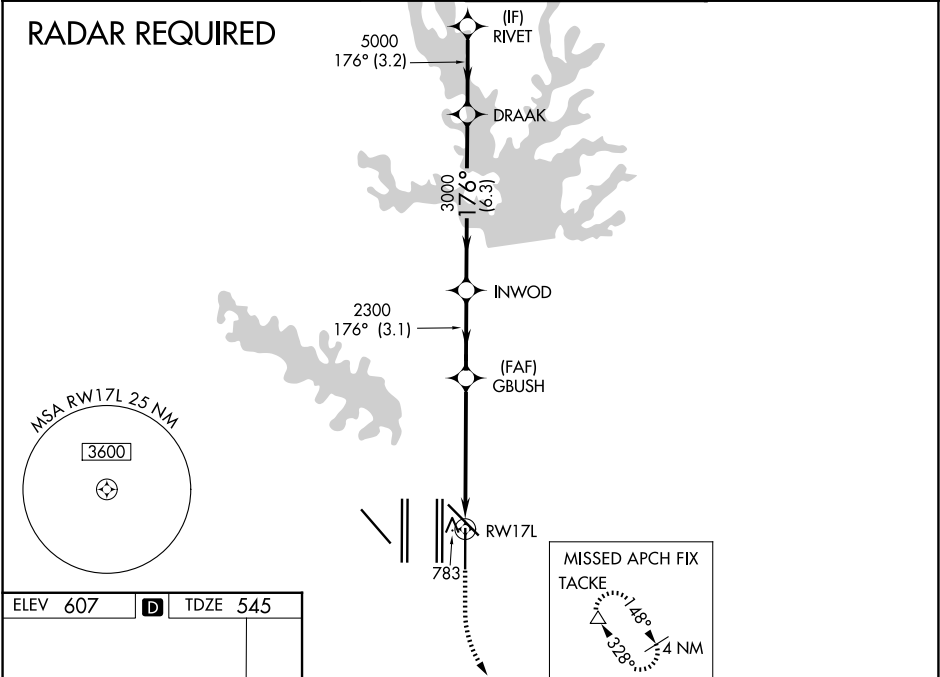

ELEV 607	D	TDZE 545
*LNAV only.		
*2 NM to RW17L		
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 77).		
DRAAK RIVET		
INWOD		
GBUSH		
RW17L		
2 NM 3.4 NM 3.1 NM 6.3 NM 3.2 NM		
CATEGORY A B C D		
LPV DA 745/18 200 (200-½)		
LNAV/VNAV DA 1063/60 518 (500-1¼)		
LNAV MDA 1240/24 695 (700-½) 1240-1½ 695 (700-1½)		