

WAAS CH 93805 W36B	APP CRS 356°	Rwy Ldg 13400 TDZE 588 Apt Elev 607
--	------------------------	--

RNAV (GPS) RWY 36L

DALLAS-FORT WORTH INTL (DFW)


▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C (25°F) or above 54°C (130°F). For inop MALSR, increase LNAV Cat C/D visibility to RVR 5500. Simultaneous approach authorized with Rwy 35L/C/R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 direct KAGLE and hold.

D-ATIS 123.775	LONE STAR APP CON 118.425	DFW TOWER 126.55 127.5 (E) 124.15 134.9 (W)	GND CON 121.65 121.8 (E) 121.85 (W)
--------------------------	-------------------------------------	---	---

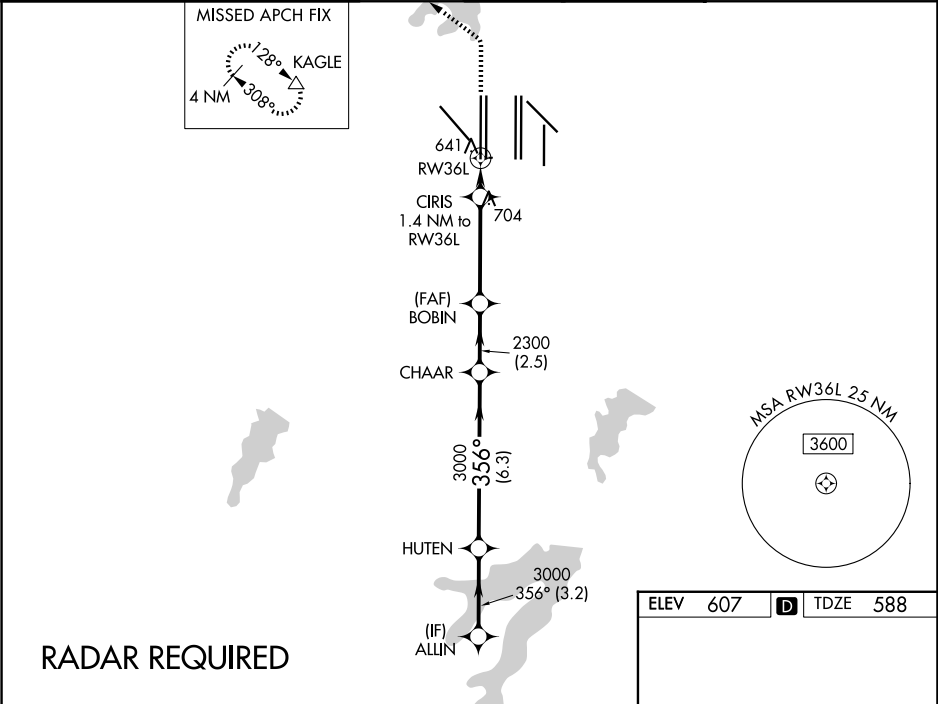

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).		1100	3000	KAGLE
*LNAV only.				
CATEGORY	A	B	C	D
LPV DA	788/18		200 (200-½)	
LNAV/VNAV DA	987/45		399 (400-¾)	
LNAV MDA	960/24 372 (400-½)		960/35 372 (400-¾)	

HIRL all Rwy's
REIL Rwy's 13L and 31L
TDZL/RCLS all Rwy's except 13L and 31L