

LOC/DME I-CFU 108.3 Chan 20	APP CRS 331°	Rwy Ldg 5500 TDZE 217 Apt Elev 236
---	------------------------	---

ILS or LOC RWY 33

RICHMOND EXEC/CHESTERFIELD COUNTY (FCI)


T When local altimeter setting not received, use RIC altimeter
A setting and increase S-LS 33 DA to 454 feet; increase all MDAs
40 feet and S-LOC 33 visibility Cat C/D $\frac{1}{8}$ SM, and Circling
visibility Cat C/D $\frac{1}{4}$ SM. VDP NA when using RIC altimeter setting.

MALSR



MISSED APPROACH: Climb to 800, then climbing left turn to 2000 on heading 148° and on RIC VORTAC R-223 to MATOX INT/RIC 16.3 DME and hold, continue climb-in-hold to 2000.

AWOS-3PT 128.625	POTOMAC APP CON 126.75 307.2	CLNC DEL 124.6	UNICOM 123.05 (CTAF) 0
----------------------------	--	--------------------------	----------------------------------

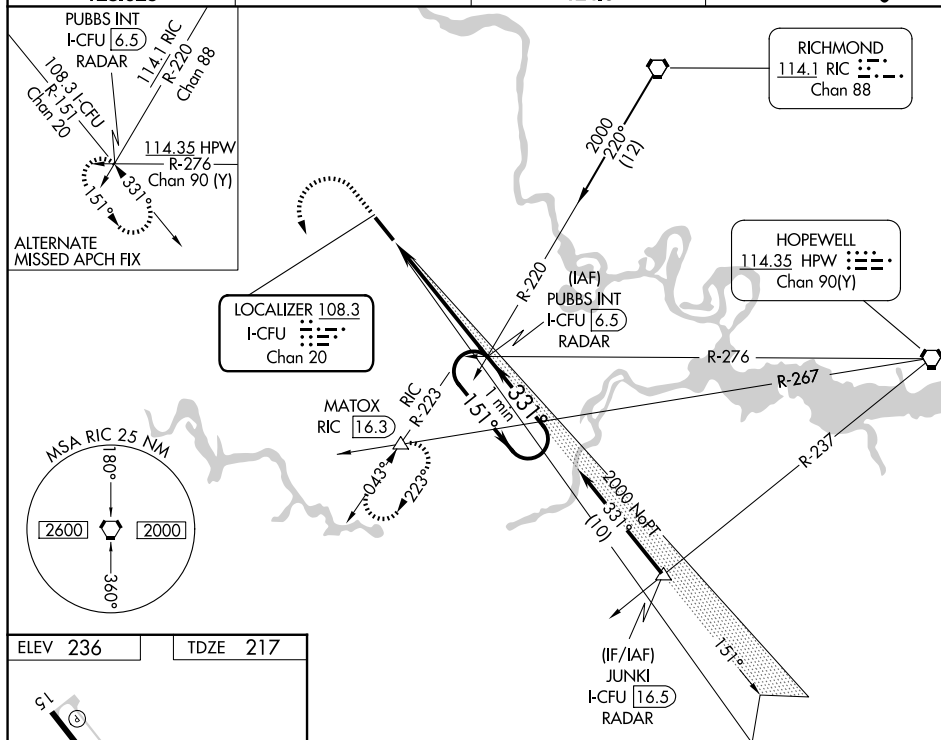

ELEV 236 TDZE 217

51 33

5500 X 100

0.7% UP

331°

REIL Rwy 15 L

HIRL Rwy 15-33 L

FAF to MAP 5.4 NM

	60	90	120	150	180
Knots	5:24	3:36	2:42	2:10	1:48
Min:Sec					

800 ↑ hdg 148° RIC R-223 MATOX △	PUBBS INT I-CFU 6.5 RADAR			One Minute Holding Pattern
*LOC only. 				
CATEGORY	A	B	C	D
S-ILS 33	417-½ 200 (200-½)			
S-LOC 33	660-½ 443 (500-½)		660-¾ 443 (500-¾)	
CIRCLING	720-1 484 (500-1)	820-1 584 (600-1)	820-1½ 584 (600-1½)	1020-2½ 784 (800-2½)