


APP CRS	Rwy Ldg	3803
100°	TDZE	424
	Apt Elev	424

RNAV (GPS) RWY 10

WILLIAMSON/SODUS (SDC)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3100 direct WALCO and hold. Continue climb-in-hold to 3100.
Procedure NA at night. Rwy 10 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Rochester altimeter setting and increase all MDAs 80 feet and LNAV visibility Cat C ¾ SM, and Circling visibility Cat C ¾ SM.	

AWOS-3 124.2	ROCHESTER APP CON 119.55 269.6	UNICOM 122.8 (CTAF) 0
-----------------	-----------------------------------	--------------------------

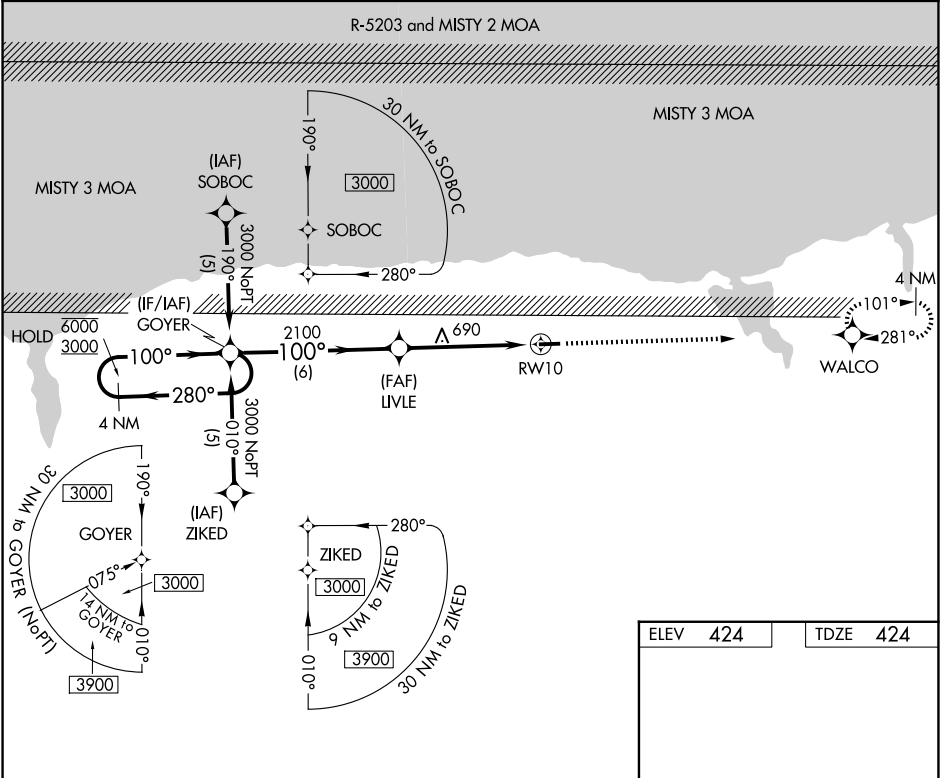

4 NM Holding Pattern 6000 3000 ←280° 100°→		GOYER 100° 2100 3.00° TCH 40	LIVLE 3100 ↑ WALCO ⬠	RW10 100° 10 3803 X 60 28
CATEGORY	A	B	C	D
LNAV MDA	940-1	516 (600-1)	940-1 ³ / ₈ 516 (600-1 ³ / ₈)	NA
CIRCLING	1000-1 576 (600-1)	1020-1 596 (600-1)	1120-2 696 (700-2)	NA

MIRL Rwy 10-28 0
REIL Rwys 10 and 28 0