

WAAS CH 40238 W27A	APP CRS 273°	Rwy Ldg 3641 TDZE 708 Apt Elev 708
--	------------------------	---

APP CR
273°

Rwy Ldg	3641
TDZE	708
Apt Elev	708

RNAV (GPS) RWY 27
ARENS FLD (RWN)

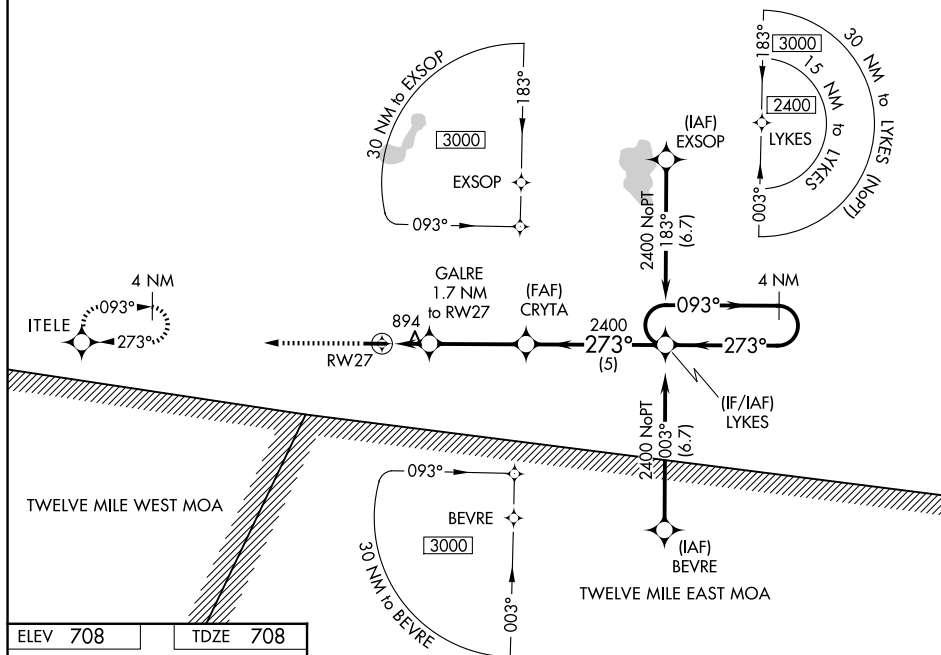
ARENS FLD (RWN)

T	Baro-VNAV NA. Use Knox altimeter setting; when not received, use Rochester altimeter setting and increase all DA/MDA 20 feet and LNAV/VNAV all Cnts visibility $\frac{1}{8}$ mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below $\frac{3}{4}$ SM NA.
----------	---

MISSED APPROACH: Climb to 2400 direct ITELE and hold.

OXI AWOS-3
135.775

SOUTH BEND APP CON ★
132.05 257.8

UNICOM
122.8 (CTAF) **L**

ELEV 708

TDZE 708

2400	ITELE
------	-------

VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 23).

4 NM
Holding Pattern

*LNAV only.

GALRE

GALRE

1.7 NM

•

3°—

GP 3.00°
TCH 45

*LNAV only.

RW27

CATEGORY	A	B	C	D
LPV DA	995-1 287 (300-1)			NA
LNAV/ VNAV DA	1224-1 ³ / ₄ 516 (600-1 ³ / ₄)			NA
LNAV MDA	1200-1 492 (500-1)	1200-1 ³ / ₈ 492 (500-1 ³ / ₈)		NA
CIRCLING	1240-1 532 (600-1)	1480-2 ¹ / ₄ 772 (800-2 ¹ / ₄)		NA

MIRL Rwy 9-27 **L**
REIL Rwy 9 and 2