

WAAS CH 65999 W05A	APP CRS 053°	Rwy Ldg TDZE 700 Apt Elev 700
--	------------------------	---

RNAV (GPS) RWY 5

BESSEMER NTL (EKY)


▼

NA

Baro-VNAV NA when using Alabaster altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Alabaster altimeter setting and increase LPV DA to 941 feet, LNAV/VNAV DA to 1285 feet, and all MDAs 60 feet; increase Circling Cat D visibility ¼ SM.

MISSED APPROACH: Climb to 4000 direct IKIMY and on track 108° to HANDE and hold.

AWOS-3PT 118.825	BIRMINGHAM APP CON 124.9 351.85	CLNC DEL 123.75	UNICOM 123.0 (CTAF)
----------------------------	---	---------------------------	-------------------------------

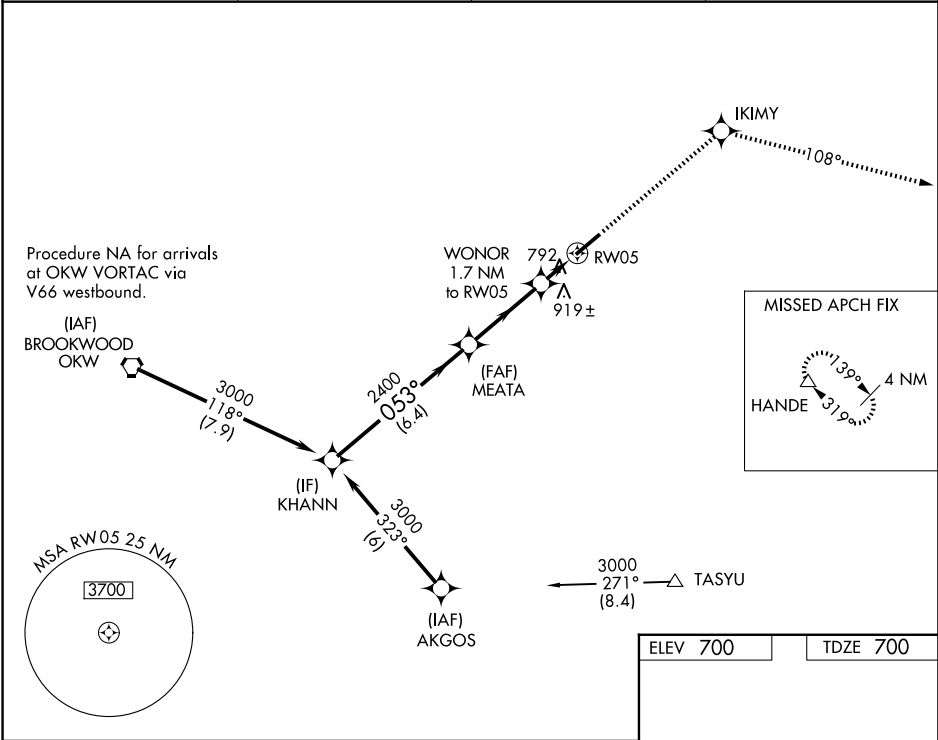

Procedure Turn NA	KHANN				4000	IKIMY	tr 108°	HANDE
	3000				2400	2400	1300	
GP 3.00° TCH 60		053°		MEATA	WONOR 1.7 NM to RW05			
		2400			RW05			
		6.4 NM		3.4 NM	1.7 NM			
CATEGORY	A	B	C	D	* LNAV only			
LPV DA	900-¾		200 (200-¾)					
LNAV/VNAV DA	1244-2		544 (600-2)					
LNAV MDA	1160-1	460 (500-1)	1160-1⅜ 460 (500-1⅜)	1160-1½ 460 (500-1½)				
CIRCLING	1200-1	500 (500-1)	1220-1½ 520 (600-1½)	1320-2 620 (700-2)				

