


WAAS CH 61313 W29A	APP CRS 292°	Rwy Ldg TDZE 137 Apt Elev 142
--	------------------------	---

RNAV (GPS) RWY 29
ST MARY'S COUNTY RGNL (2W6)

RNP APCH - GPS.	Rwy 29 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Patuxent River altimeter setting: increase LPV DA to 475 feet and all visibilities ½ SM, increase LNAV/VNAV DA to 688 feet and all visibilities ¼ SM. Increase all MDAs 40 feet and LNAV visibility Cats C/D ½ SM.	MISSED APPROACH: Climb to 700 then climbing left turn to 5000 direct COLIN and hold, continue climb in hold to 5000.
-----------------	--	---

AWOS-3 119.575	PATUXENT APP CON ★ 121.0 250.3	UNICOM 123.0 (CTAF) 0
--------------------------	--	---------------------------------

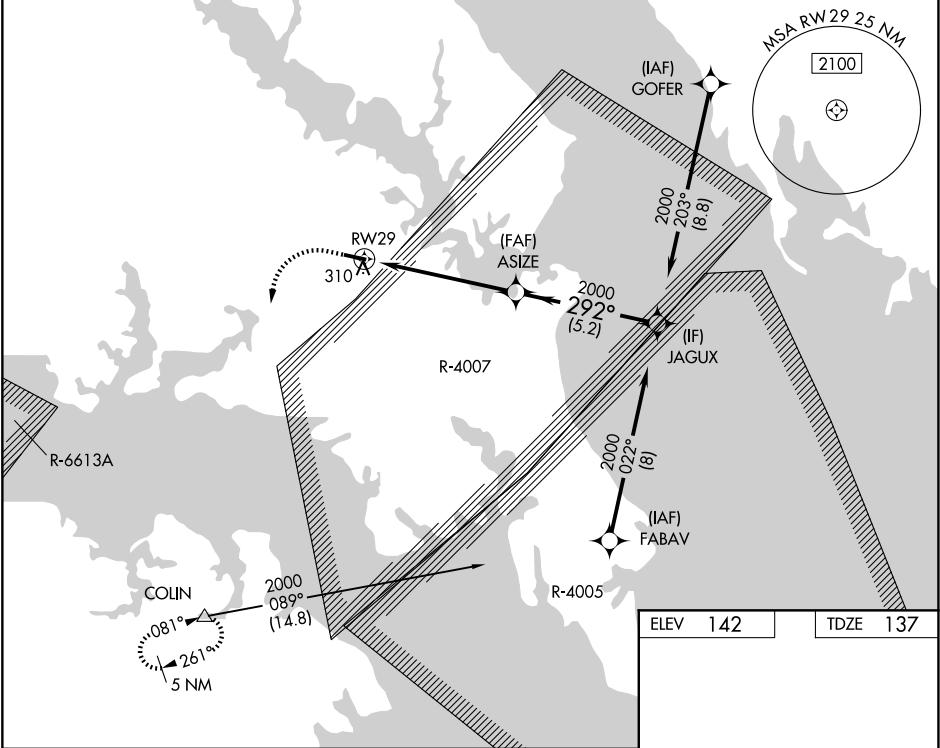

700	5000	COLIN
↑	↶	△
RW29		ASIZE 2000
1.5 NM to RW29		292°
1.5 NM		2000
4.1 NM		2000
5.2 NM		GP 3.10° TCH 40
CATEGORY	A	B
LPV DA	441-1 7/8	304 (300-1/2)
LNAV/VNAV DA	654-1 3/8	517 (600-1/2)
LNAV MDA	620-1 483 (500-1)	620-1 3/8 483 (500-1/2)
CIRCLING	660-1 518 (600-1)	840-2 698 (700-2)

ELEV 142	TDZE 137
REIL Rwy 11 and 29 0	0
MIRL Rwy 11-29 0	0