

WAAS CH 82311 W22A	APP CRS 218°	Rwy Ldg TDZE Apt Elev	6000 1025 1025
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 22

UPPER CUMBERLAND RGNL (SRB)

Baro-VNAV NA when using Crossville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crossville altimeter setting and increase LPV DA to 1447 feet, LNAV/VNAV DA to 1633 feet, increase LPV and LNAV/VNAV visibility ¾ SM. Increase all MDA 180 feet and LNAV Cat C visibility ¼ SM, Cat D visibility ½ SM. Increase Circling Cat C visibility ¾ SM and Circling Cat D visibility ¼ SM. VDP NA when using Crossville altimeter setting.

MISSED APPROACH:
Climb to 4000 direct WENUB and hold.

AWOS-3P 128.25	MEMPHIS CENTER 128.15 323.125	UNICOM 122.975 (CTAF)
--------------------------	---	---------------------------------

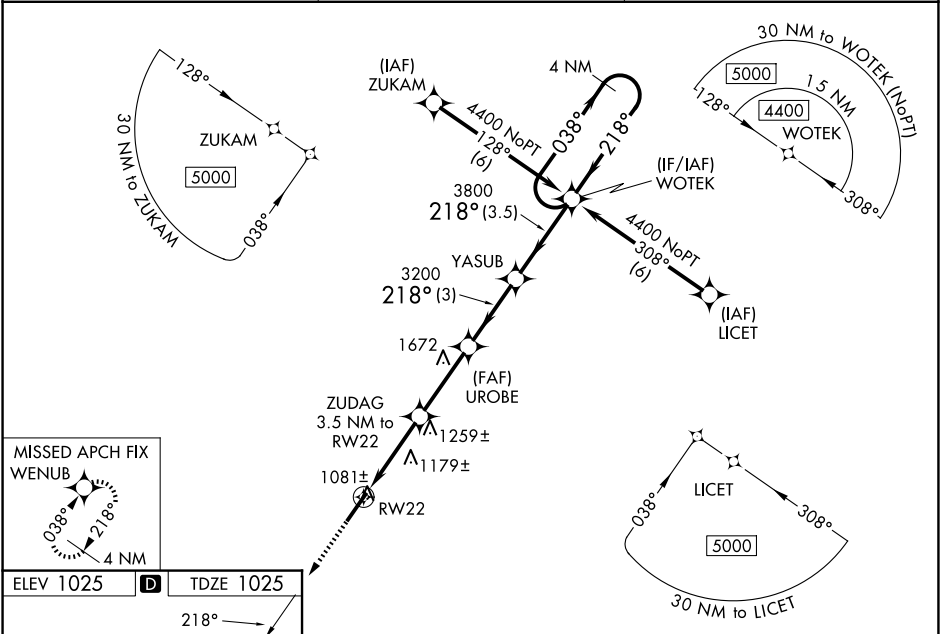

4000

↑

WENUB

✦

VGSI and RNAV glidepath not coincident

(VGSI Angle 3.00/TCH 25).

WOTEK

Holding Pattern

*LNAV only

RW22

1.2 NM

2.3 NM

3 NM

3 NM

3.5 NM

UROBE

3200

218°

3800

218°

4400

038°

GP 3.00°

TCH 55

CATEGORY	A	B	C	D
LPV DA	1275-¾ 250 (300-¾)			
LNAV/VNAV DA	1461-1½ 436 (500-1½)			
LNAV MDA	1440-1	415 (500-1)	1440-1¼	415 (500-1¼)
CIRCLING	1480-1	455 (500-1)	1600-1½ 575 (600-1½)	1880-2¾ 855 (900-2¾)

HIRL Rwy 4-22

REIL Rlys 4 and 22

RLS Rwy 4