


WAAS CH 58301 W18A	APP CRS 178°	Rwy Ldg 6000 TDZE 447 Apt Elev 447	RNAV (GPS) RWY 18 MESQUITE METRO (HQZ)
--	------------------------	---	--

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Dallas Love Fld altimeter setting and increase all DA/MDA 60 feet. Increase LPV all Cats visibility to 1 mile, LNAV Cat C visibility to 1 3/8 and Circling Cat C visibility to 2 1/4. Helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH: Climb to 3000 direct IKUSE then on track 117° to YEAGR and hold.

AWOS-3 118.175	LONE STAR APP CON 125.2 343.65	MESQUITE TOWER★ 120.3 (CTAF) 0	GND CON 118.85	UNICOM 123.05
--------------------------	--	--	--------------------------	-------------------------

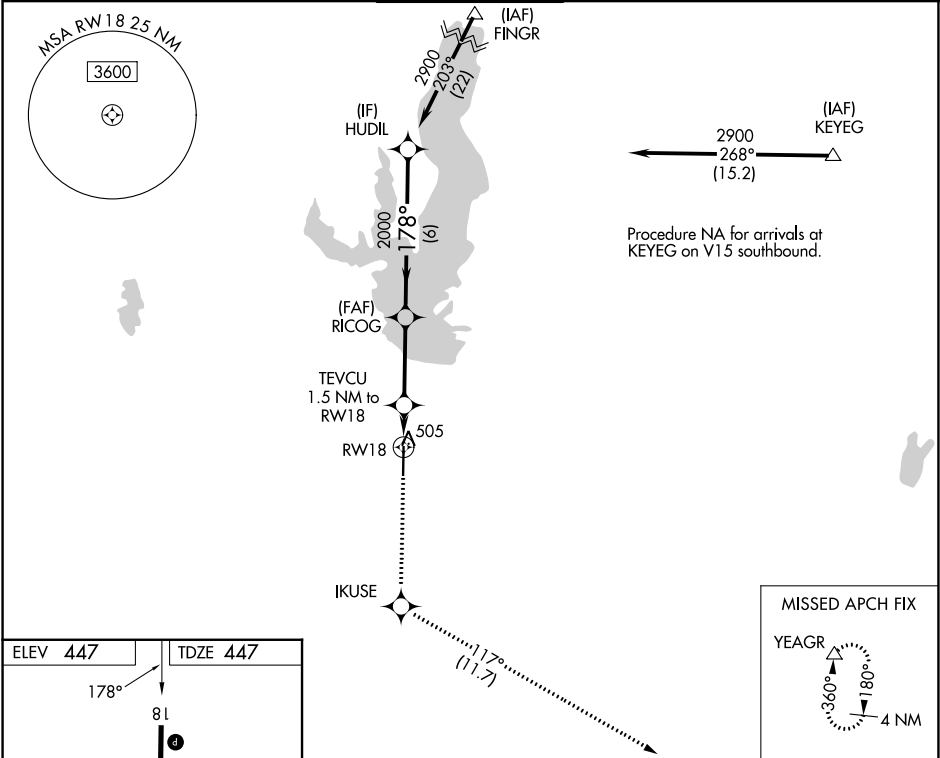

ELEV 447	TDZE 447			
178°	81			
TWR → ☆	6000 X 6000			
36	980*			
MIRL Rwy 18-36 0	REIL Rwy 18 and 36 0			
RLLS Rwy 18 and 36 0				
3000	IKUSE			
tr 117°	YEAGR			
*RNAV only.	RICOG			
TEVCU 1.5 NM to RWY 18	2000			
RWY 18	2900			
1.5 NM	3.1 NM	6 NM		
CATEGORY	A	B	C	D
LPV DA	697-3/4	250 (300-3/4)		NA
LNAV MDA	860-1	413 (500-1)	860-1 1/8 413 (500-1 1/8)	NA
CIRCLING	960-1	513 (600-1)	1160-2 713 (800-2)	NA

SC-2, 06 AUG 2026 to 03 SEP 2026

SC-2, 06 AUG 2026 to 03 SEP 2026