



WAAS CH 93516 W17A	APP CRS 171°	Rwy Idg 5000 TDZE 5 Apt Elev 5
--	------------------------	---

RNAV (GPS) RWY 17
MARCO ISLAND EXEC (MKY)

RNP APCH-GPS. Baro-VNAV and VDP NA when using APF altimeter setting. Rwy 17 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C. When local altimeter setting not received, use APF altimeter setting and increase LPV DA to 326 feet; increase LNAV/VNAV DA to 484 feet; increase all MDAs 40 feet and visibility Cat C ¼ SM.			MISSED APPROACH: Climb to 2000 direct ONSAW and hold.
AWOS-3PT 120.075	FORT MYERS APP CON ★ 124.125 371.85	CLNC DEL 120.8	UNICOM 122.7 (CTAF) 0

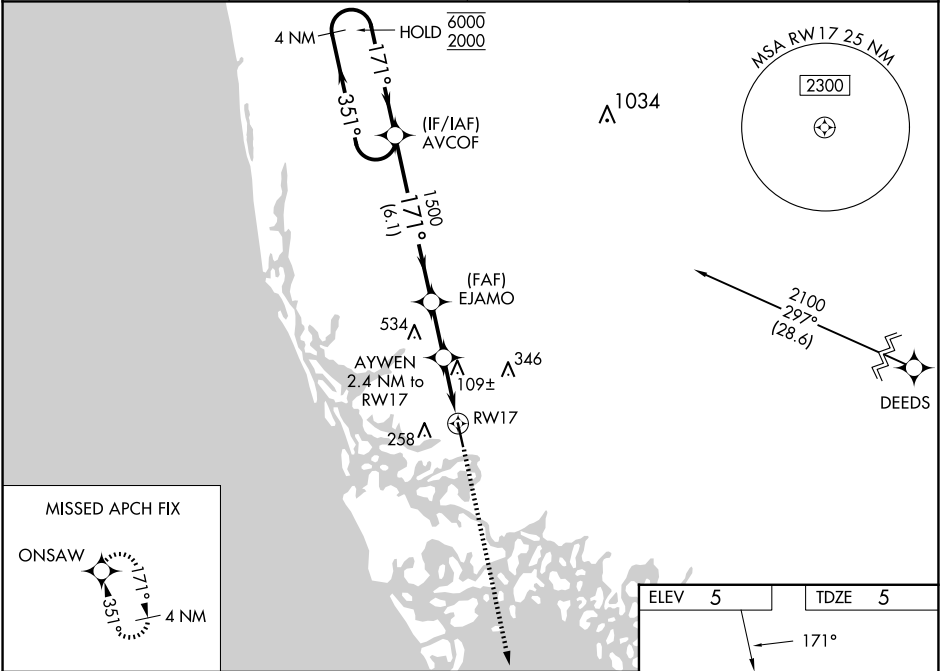

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 31).		2000	ONSAW
6000 2000		EJAMO 1500		AYWEN 2.4 NM to RWY 17	
GP 3.00° TCH 60		1500		1.7 NM to RWY 17	
6.1 NM		2.1 NM		0.8 NM	
CATEGORY		A		B	
LPV DA		300-1		295 (300-1)	
LNAV/VNAV DA		458-1½		453 (500-1½)	
LNAV MDA		560-1		555 (600-1)	
CIRCLING		620-1		615 (700-1)	

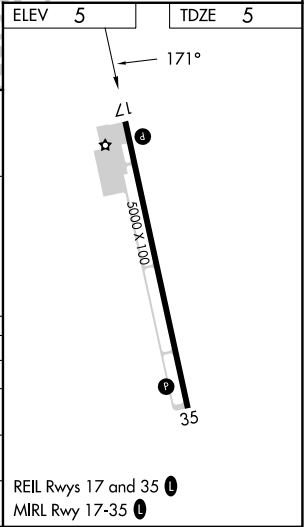

SE-3, 06 AUG 2026 to 03 SEP 2026

SE-3, 06 AUG 2026 to 03 SEP 2026