

WAAS CH 69646 W07A	APP CRS 072°	Rwy Ldg TDZE Apt Elev	6005 862 862
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 7


INDIANAPOLIS RGNL (MQJ)

RNP APCH - GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
▲ Rwy 7 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using IND altimeter setting. When local altimeter setting not received, use IND altimeter setting and increase LPV DA to 1271 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1194 feet and all visibilities ½ SM; increase all MDAs 60 feet and LNAV visibility Cat C and D ¼ SM.

MISSED APPROACH: Climb to 2700 direct FOGBU and hold.

AWOS-3PT 127.95	INDIANAPOLIS APP CON 127.15 317.8	UNICOM 122.975 (CTAF) 0
---------------------------	---	-----------------------------------

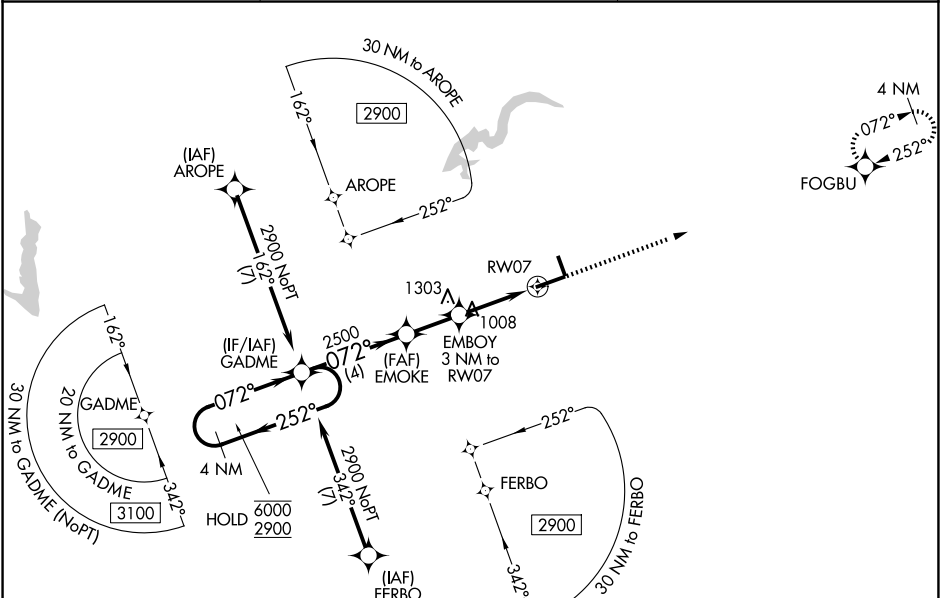

		ELEV 862		TDZE 862	
4 NM Holding Pattern 6000 ← 252° 2900 → 072°		GADME 2500 1840		EMOKE 2500 1840	
GP 3.00° TCH 40		EMBOY 3 NM to RW07 1.1 NM to RW07		2700 FOGBU	
		4 NM 2 NM 1.9 NM 1.1 NM		RW07	
CATEGORY	A	B	C	D	
LPV DA	1216-1		354 (400-1)		
LNAV/VNAV DA	1139-7/8		277 (300-7/8)		
LNAV MDA	1260-1	398 (400-1)	1260-1 1/8	398 (400-1 1/8)	

REIL Rws 7 and 34
MIRL Rwy 16-34
HIRL Rwy 7-25