



WAAS CH 45715 W33A	APP CRS 333°	Rwy Ldg TDZE 485 Apt Elev 488
--	------------------------	---

RNAV (GPS) RWY 33

WASHINGTON RGNL (F'Y'G)

RNP APCH-GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.	MISSED APPROACH: Climb to 2700 direct EQAXO and hold.
--	---

AWOS-3PT 121.325	ST. LOUIS APP CON 126.5 254.3	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

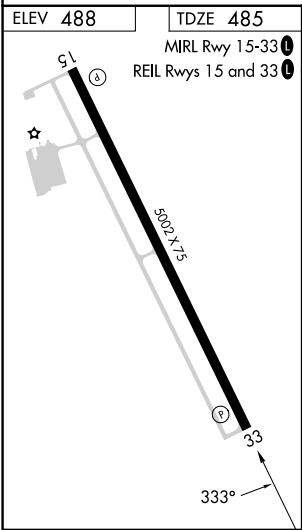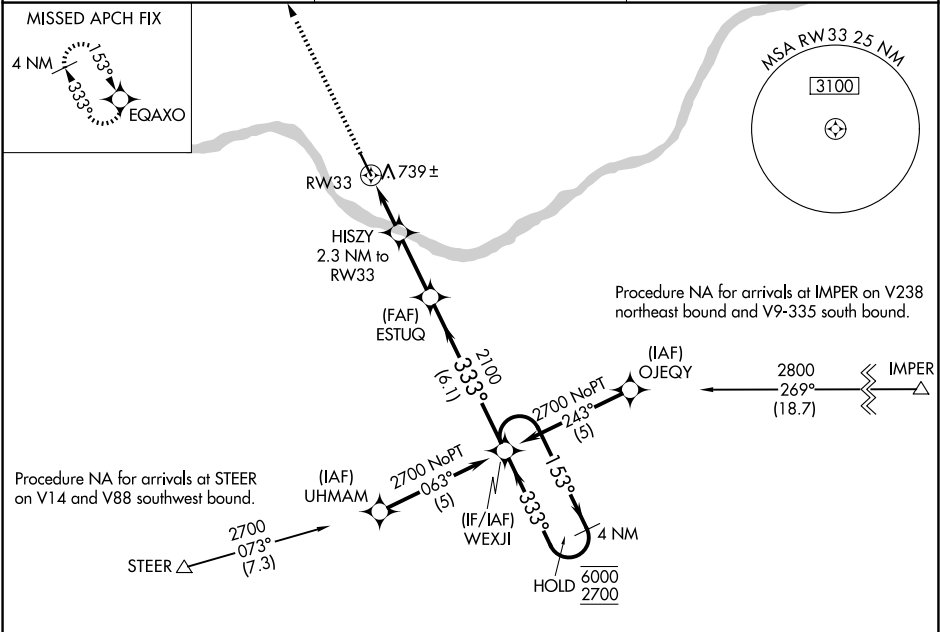

2700	EQAXO	HISZY 2.3 NM to RW33	ESTUQ	WEXJI	4 NM Holding Pattern
1.5 NM	0.8	2.6 NM	6.1 NM	153°	6000
333°	1260	2100	333°	333°	2700
GP 3.00°	TCH 43				
CATEGORY	A	B	C	D	
LPV DA	823-1	338 (400-1)		NA	
LNAV/VNAV DA	1050-1 $\frac{3}{8}$	565 (600-1 $\frac{3}{8}$)		NA	
LNAV MDA	1000-1	515 (600-1)	1000-1 $\frac{3}{8}$ 515 (600-1 $\frac{3}{8}$)	NA	
CIRCLING	1220-1 732 (800-1)	1260-1 772 (800-1)	1520-3 1032 (1100-3)	NA	