

WAAS CH 45803 W19A	APP CRS 187°	Rwy Ldg TDZE 795 Apt Elev 798
--	------------------------	---

RNAV (GPS) RWY 19

SKYHAVEN (RCM)

RNP APCH - GPS.



▼

▲

Baro-VNAV NA when using SZL altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 19 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use SZL altimeter setting and increase LPV DA to 1084 feet; increase LNAV/VNAV DA to 1139 feet; increase all MDAs 40 feet; and Circling visibility Cat C ½ SM.

MISSED APPROACH: Climb to 3000 direct BEJCY and hold.

AWOS-3PT 119.575	WHITEMAN APP CON ★ 127.45 284.0	UNICOM 123.0 (CTAF) 0
----------------------------	---	---------------------------------

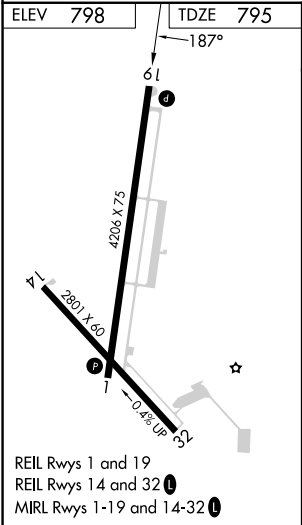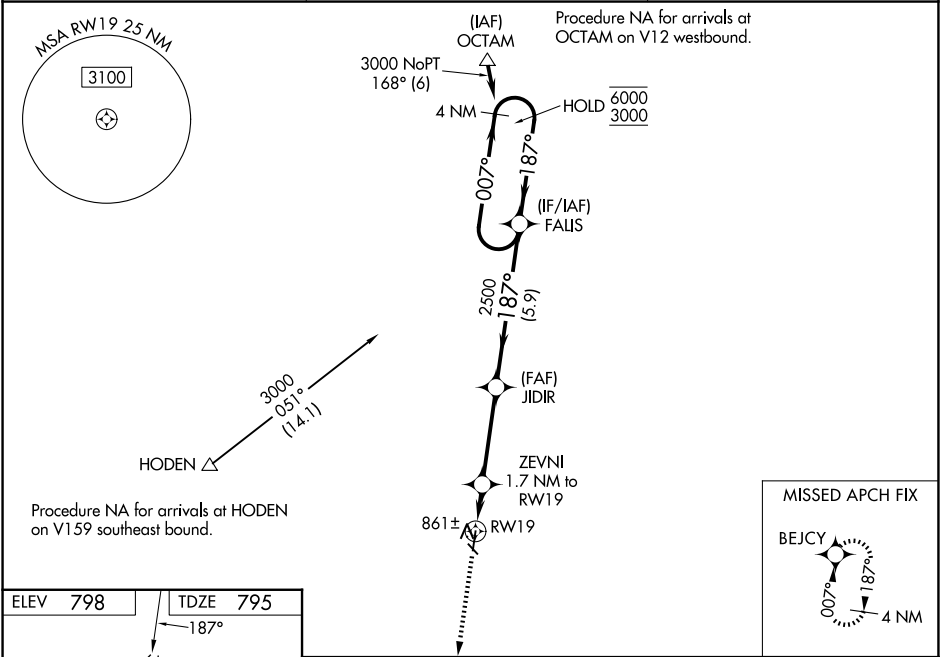

3000 BEJCY		FALIS		4 NM Holding Pattern	
↑		JIDIR		007° → 6000 ← 187° 3000	
ZEVNI 1.7 NM to RWY 19		2500		GP 3.00° TCH 40	
RWY 19		1360			
1.7 NM		3.5 NM		5.9 NM	
CATEGORY	A	B	C	D	
LPV DA	1045-1		250 (300-1)		NA
LNAV/VNAV DA	1100-1		305 (400-1)		NA
LNAV MDA	1240-1		445 (500-1)		1240-1⅜ 445 (500-1⅜)
CIRCLING	1260-1 462 (500-1)		1340-1 542 (600-1)		1380-1½ 582 (600-1½)