


RNAV (GPS) RWY 15

EL DORADO/CAPT JACK THOMAS MEML (EQA)

V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above
A 54°C. Rwy 15 helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter
NA setting not received, use Colonel James Jabara altimeter setting and increase all DA
51 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility $\frac{1}{8}$ mile.
Baro-VNAV and VDP NA when using Colonel James Jabara altimeter setting.


MISSED APPROACH:
Climb to 3100 direct
BSHWD and hold.

WICHITA APP CON
134.8 269.1

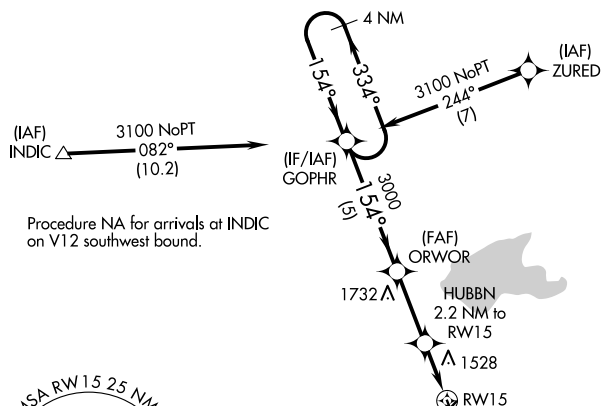UNICOM
122.8 (CTAF) **L**

Procedure NA for arrivals at INDIC on V12 southwest bound.

Procedure NA for arrivals at UBWIK on
V354 northbound and V132 eastbound.




MISSED APCH FIX

BSHWD

4 NM

54°

334°

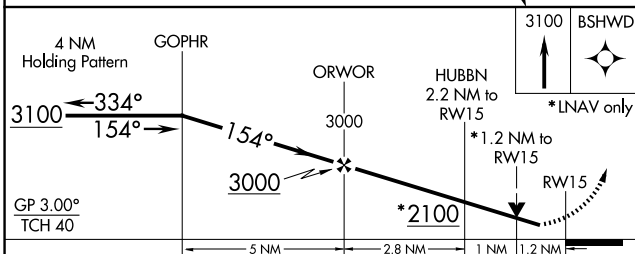

CATEGORY	A	B	C	D
LPV DA	1628-1	250 (300-1)	NA	
LNAV/ VNAV DA	1843-1 $\frac{5}{8}$	465 (500-1 $\frac{1}{2}$)	NA	
LNAV MDA	1780-1	402 (500-1)	NA	
CIRCLING	1820-1 441 (500-1)	1960-1 581 (600-1)	NA	

