

WAAS
CH **97434**
W22A

APP CRS
218°

Rwy Ldg
TDZE **1378**
Apt Elev **1379**

RNAV (GPS) RWY 22

EL DORADO/CAPT JACK THOMAS MEML (EQA)


▼

▲ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Colonel James Jabara altimeter setting and increase all DA 51 feet and all MDA 60 feet; increase LNAV/VNAV all Cnts visibility ½ mile. Baro-VNAV and VDP NA when using Colonel James Jabara altimeter setting.

MISSED APPROACH:
Climb to 3000 direct CERVK and hold.

AWOS-3P 120.875	WICHITA APP CON 134.8 269.1	UNICOM 122.8 (CTAF) 0
---------------------------	---------------------------------------	---------------------------------

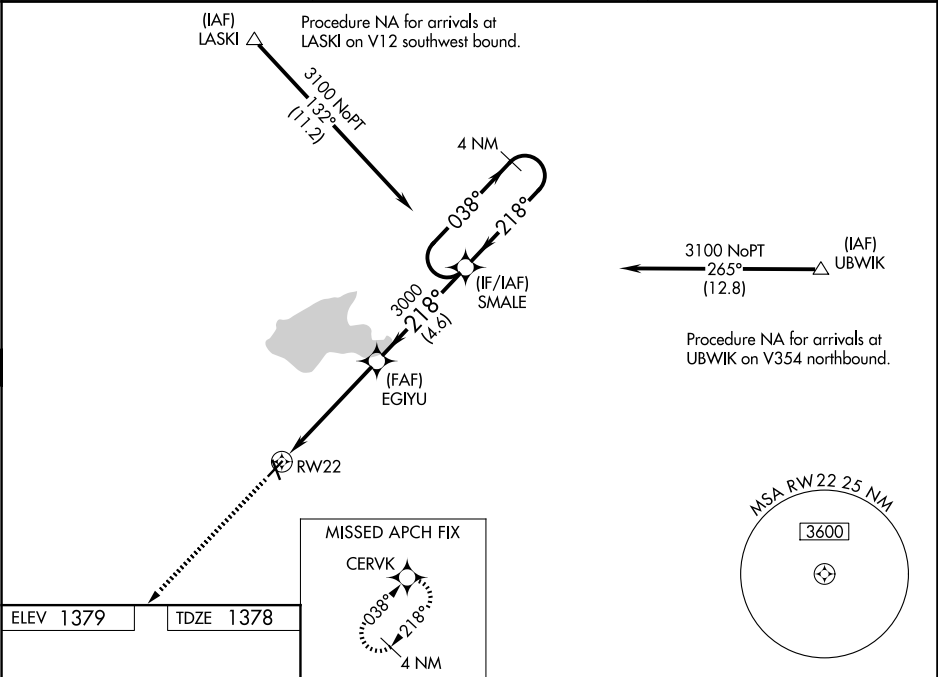

HIRL Rwy 4-22 and 15-33 1