

LOC/DME I-JKA 110.7 Chan 44	APP CRS 270°	Rwy Ldg 6500 TDZE 17 Apt Elev 17
---	------------------------	---

ILS or LOC RWY 27
GULF SHORES INTL/JACK EDWARDS FLD (JTK A)




 Circling Rwy 17, 35 NA at night. VDP NA with Pensacola Intl altimeter setting. When local altimeter setting not received, use Pensacola Intl altimeter setting and increase DA to 295 feet; increase all MDAs 80 feet; increase S-LOC 27 visibility Cats C and D 3/8 SM; increase S-LOC 27 GEVBE FIX minimums visibility Cats C and D visibility 1/4 SM; increase all Circling visibility Cat C and D 1/4 SM. GEVBE FIX MINIMUMS: For inop ALS, increase S-LOC 27 visibility Cats C and D to 1 1/8 SM. PENSACOLA INTL ALTIMETER SETTING MINIMUMS: For inop ALS, increase S-LS 27 visibility all Cats to 7/8, increase S-LOC 27 visibility Cats C and D to 1 3/8 SM; increase GEVBE FIX minimums S-LOC 27 visibility Cats C and D to 1 3/8 SM.

MALSR



MISSED APPROACH:
Climb to 2000 on
heading 270° and
BFM VORTAC
R-145 to URIVY
INT/BFM 16.6 DME
and hold.

ATIS 134.525	PENSACOLA APP CON 120.65 270.8	GULF SHORES TOWER ★ 118.65 (CTAF) 0	GND CON 121.7	UNICOM 122.7
------------------------	--	---	-------------------------	------------------------

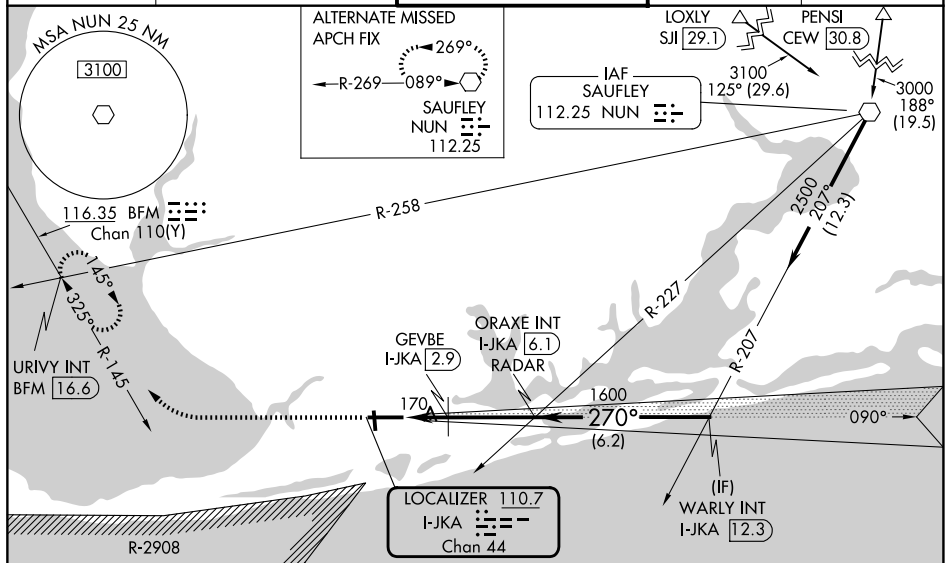

ELEV 17 TDZE 17

2000
hdg 270°

BFM R-145

URIVY INT

** 620 when using Pensacola Int altimeter setting.

ORAXE INT
I-JKA 6.1

WARLY INT
I-JKA 12.3

GEVBE
I-JKA 2.9

I-JKA 1.3

I-JKA 2.4

** 540

1600

2500

270°

GS 3.00°
TCH 47

1.1 NM 0.5 3.2 NM 6.2 NM

CATEGORY	A	B	C	D
S-ILS 27	217- ¹ / ₂		200 (200- ¹ / ₂)	
S-LOC 27	540- ¹ / ₂ 523 (600- ¹ / ₂)		540-1 523 (600-1)	
CIRCLING	540-1 523 (600-1)		740-2 723 (800-2)	740-2 ¹ / ₄ 723 (800-2 ¹ / ₄)
GEVBE FIX MINIMUMS				
S-LOC 27	420- ¹ / ₂ 403 (500- ¹ / ₂)		420- ³ / ₄ 403 (500- ³ / ₄)	
CIRCLING	480-1 463 (500-1)		740-2 723 (800-2)	740-2 ¹ / ₄ 723 (800-2 ¹ / ₄)

MIRL Rwy 17-35

HIRL Rwy 9-27

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36