


ILS Y or LOC Y RWY 23
LINCOLN COUNTY RGNL (IPJ)

A VDP NA when using CLT altimeter setting. Rwy 23 helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use CLT altimeter setting: increase S-ILS 23 DA to 1213 feet and visibilities $\frac{1}{2}$ SM; increase all MDAs 80 feet and S-LOC 23 visibilities Cats C/D $\frac{1}{2}$ SM and Circling visibility Cats C/D $\frac{1}{2}$ SM; increase GATEQ Fix Minimums S-LOC visibility Cats C/D and Circling visibility Cats C/D $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 1600 then climbing right turn to 3100 direct JIVOM and hold.

AWOS-3 119.675	CHARLOTTE APP CON 134.75 257.2	CLNC DEL (GCO) 124.9	UNICOM 123.05 (CTAF) ①
--------------------------	--	--------------------------------	----------------------------------

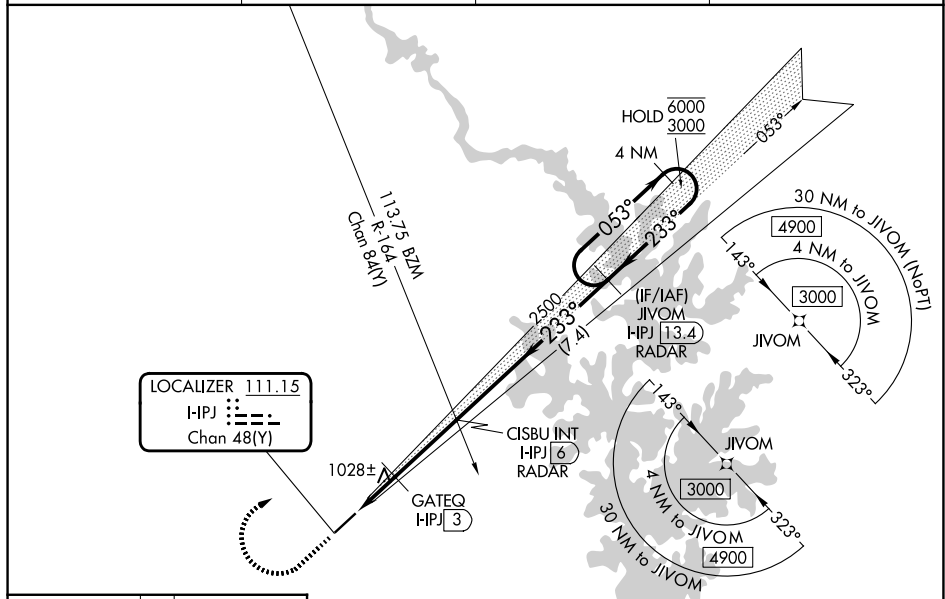

CATEGORY	A	B	C	D
S-ILS 23	1149- ⁷ / ₈ 277 (300- ⁷ / ₈)			
S-LOC 23	1460-1	588 (600-1)	1460-1 ³ / ₄	588 (600-1 ³ / ₄)
CIRCLING	1460-1	582 (600-1)	1660-2 ¹ / ₄ 782 (800-2 ¹ / ₄)	1660-2 ¹ / ₂ 782 (800-2 ¹ / ₂)

GATEQ FIX MINIMUMS

S-LOC 23	1280-1	408 (500-1)	1280-1 ¹ / ₈	408 (500-1 ¹ / ₈)
CIRCLING	1400-1 522 (600-1)	1440-1 562 (600-1)	1660-2 ¹ / ₄ 782 (800-2 ¹ / ₄)	1660-2 ¹ / ₂ 782 (800-2 ¹ / ₂)

SE-2, 06 AUG 2026 to 03 SEP 2026