


WAAS CH 99743 W06A	APP CRS 060°	Rwy Ldg 5509 TDZE 861 Apt Elev 882
--	------------------------	---

RNAV (GPS) RWY 6

ATLANTA SPEEDWAY (HMP)

RNP APCH.			MISSED APPROACH: Climb to 2600 direct YEBUT and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.			
AWOS-3 124.825	ATLANTA APP CON 128.575 343.675	CLNC DEL 128.575 343.675	UNICOM 122.725 (CTAF) ①

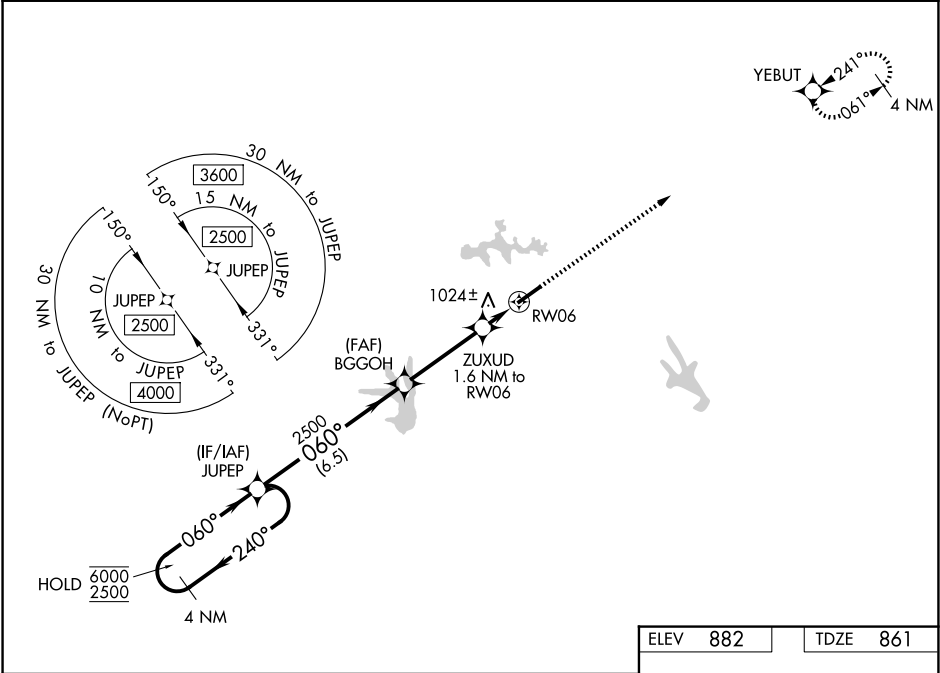

4 NM Holding Pattern		JUPEP	BGGOH	ZUXUD	RW06
6000 2500		2500	2500	1400	
GP 3.00° TCH 44					
←240° 060°→		060°			
6.5 NM		3.4 NM	1.6 NM		
CATEGORY	A	B	C	D	
LPV DA		1061-¾	200 (200-¾)		
LNAV/VNAV DA		1185-1	324 (400-1)		
LNAV MDA	1280-1	419 (400-1)	1280-1½	419 (400-1½)	
CIRCLING	1380-1 498 (500-1)	1400-1 518 (600-1)	1700-2½ 818 (900-2½)	1740-2¾ 858 (900-2¾)	

