

WAAS
CH **53624**
W19A

APP CRS
188°

Rwy Ldg **5000**
TDZE **431**
Apt Elev **436**

RNAV (GPS) RWY 19



FAYETTE COUNTY (FYE)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using Frederick W Smith Intl altimeter setting. Rwy 19 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Frederick W Smith Intl altimeter setting: increase LPV DA to 817 feet and all visibilities ½ SM, increase LNAV/VNAV DA to 779 feet; increase all MDA 100 feet and visibility LNAV Cat C ¾ SM and Circling Cat C ½ SM.

MISSED APPROACH:
Climb to 3000 direct NYATE and hold.

AWOS-3 119.875	MEMPHIS APP CON 125.8 338.3	CTAF 122.9
--------------------------	---------------------------------------	----------------------

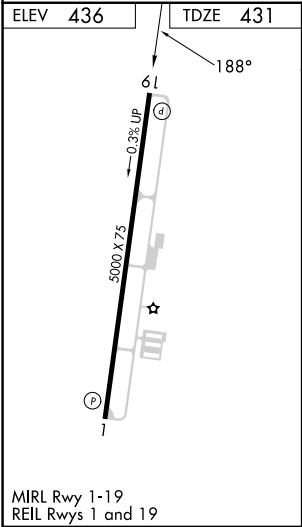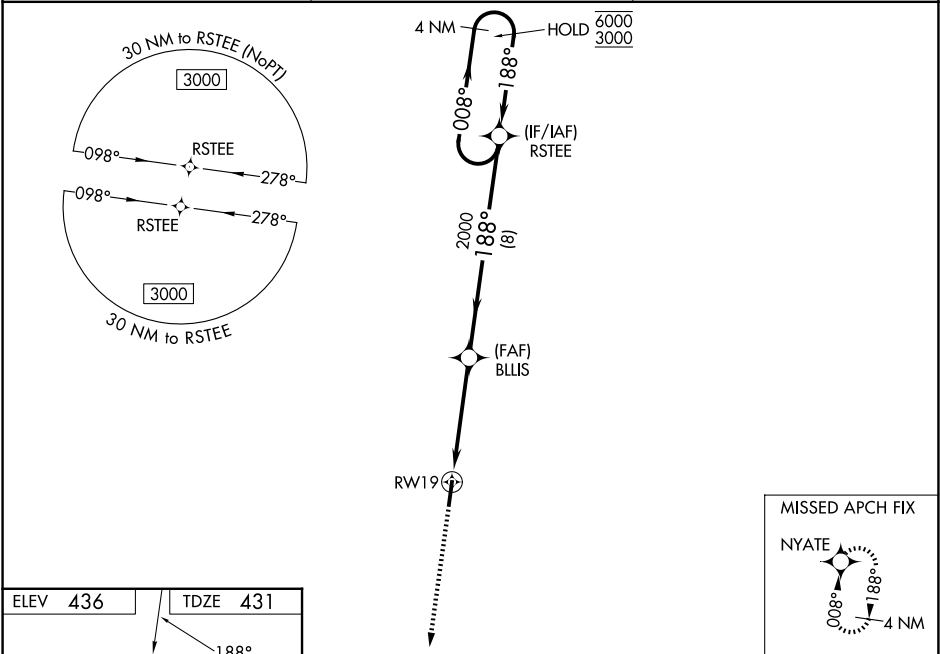

3000	NYATE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.07/TCH 31).		4 NM Holding Pattern
RWY 19		1.3 NM to RWY 19	2000	GP 3.20° TCH 55
1.3 NM		3.2 NM	8 NM	
CATEGORY	A	B	C	D
LPV DA	721-1	290 (300-1)		NA
LNAV/VNAV DA	683-1	252 (300-1)		NA
LNAV MDA	880-1	449 (500-1)	880-1 ¾ 449 (500-1 ¾)	NA
CIRCLING	900-1 464 (500-1)	920-1 484 (500-1)	1160-2 724 (800-2)	NA