
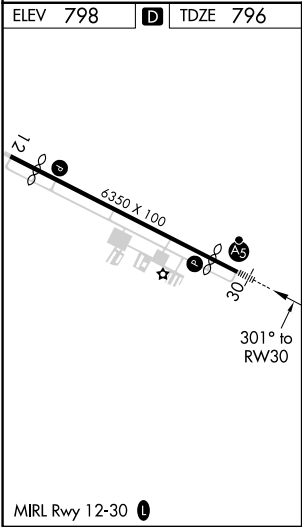


WAAS CH 58215 W30A	APP CRS 301°	Rwy ldg 4962 TDZE 796 Apt Elev 798
--	------------------------	--

RNAV (GPS) RWY 30

THOMASTON-UPSON COUNTY (OPN)

RNP APCH-GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat C/D visibility to 1 SM.		MALSR 	MISSED APPROACH: Climb to 2800 direct JOTER and hold.
AWOS-3 133.975	ATLANTA APP CON ★ 124.2 279.6	UNICOM 122.8 (CTAF) 0	

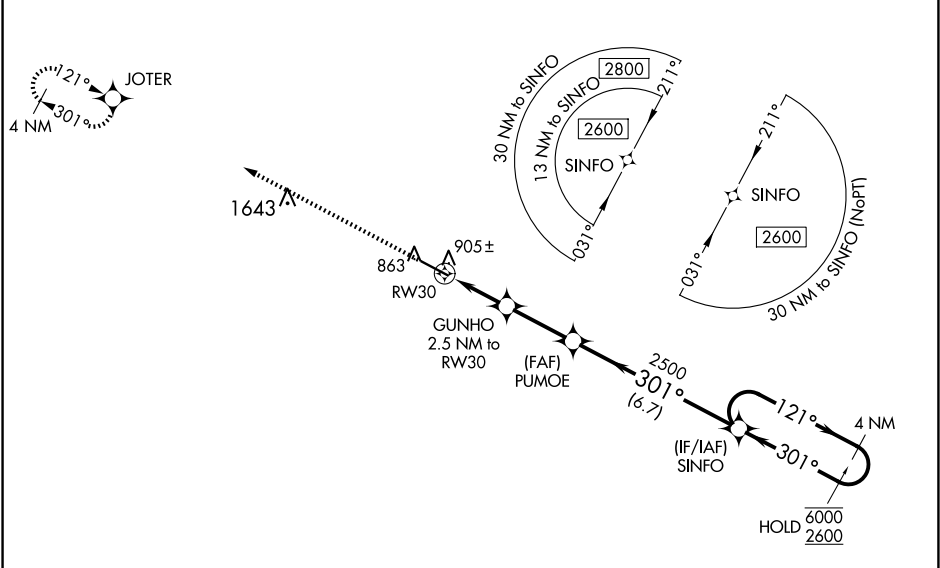

2800

JOTER

VGSI and RNAV glidepath not coincident

(VGSI Angle 3.00/TCH 27).

SINFO

4 NM Holding Pattern

1.1 NM

1.4 NM

2.7 NM

6.7 NM

1.1 NM to RW30

2.5 NM to RW30

2500

1640

2500

121°

301°

6000

2600

GP 3.00°

TCH 50

RW30

RW30

1.1 NM

1.4 NM

2.7 NM

6.7 NM

CATEGORY	A		B	C	D
LPV DA	996-½		200 (200-½)		
LNAV/ VNAV DA	1086-½		290 (300-½)		
LNAV MDA	1160-½	364 (400-½)	1160-⅝	364 (400-⅝)	
CIRCLING	1220-1 422 (500-1)	1260-1 462 (500-1)	1260-1½ 462 (500-1½)	1680-3 882 (900-3)	