


WAAS CH 56309 W03A	APP CRS 029°	Rwy Ldg 5498 TDZE 940 Apt Elev 948
--	------------------------	---

RNAV (GPS) RWY 3

GEORGETOWN-SCOTT COUNTY RGNL (27K)

RNP APCH - GPS.	▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using LEX altimeter setting. When local altimeter setting not received, use LEX altimeter setting: increase LPV DA to 1178 feet; increase LNAV/VNAV DA to 1358 feet and all visibilities ½ SM; increase all MDAs 40 feet and LNAV visibility Cat C/D ⅓ SM, and Circling visibility Cat D ¼ SM.	MISSED APPROACH: Climb to 3000 direct ETOXY and left turn on track 281° to GENUS and hold, continue climb-in-hold to 3000.
-----------------	---	--

AWOS-3 119.975	LEXINGTON APP CON 120.15 259.3 (040°-220°) 120.75 298.9 (221°-039°)	CLNC DEL 127.425	UNICOM 123.0 (CTAF) 0
--------------------------	--	----------------------------	--

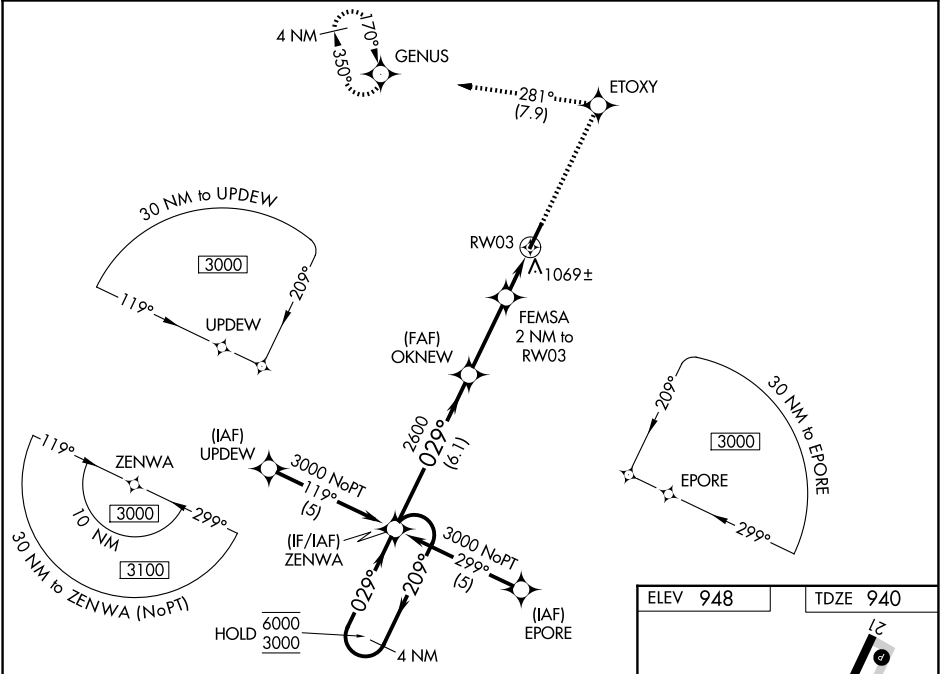

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 33).				
4 NM Holding Pattern ZENWA				
6000 ← 209° 3000 → 029° OKNEW 2600 FEMSA 2 NM to RW03 1600 RW03 1.1 NM to RW03				
GP 3.00° TCH 34				
CATEGORY	A	B	C	D
LPV DA		1140-3/4	200 (200-3/4)	
LNAV/ VNAV DA		1320-1	380 (400-1)	
LNAV MDA		1320-1	380 (400-1)	
CIRCLING	1420-1	472 (500-1)	1560-1 3/4 612 (700-1 3/4)	1660-2 1/4 712 (800-2 1/4)

