

WAAS CH 61137 W36A	APP CRS 001°	Rwy Ldg TDZE 736 Apt Elev 738	4894 736 738
--	------------------------	---	---





RNAV (GPS) RWY 36

RANTOUL NTL AVN CNTR-FRANK ELLIOTT FLD (TIP)

⚠ Baro-VNAV NA when using Champaign Urbana altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Champaign Urbana altimeter setting and increase all DA 41 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility 1/8 mile and LNAV and Circling Cats C/D visibility 1/4 mile. Helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH:
Climb to 3000 direct
ALADE and hold.

AWOS-3 119.025	CHAMPAIGN APP CON ★ 121.35 285.65	UNICOM 123.0 (CTAF) ①
--------------------------	---	---------------------------------

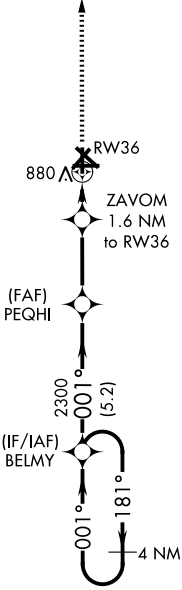

ELEV 738 TDZE 736

REIL Rwy 9 and 27 ①
MIRL Rwy 9-27 and 18-36 ②

81
75
27
5001 X 75
4894
36
001°

3000

ALADE

*LNAV only

ZAVOM

1.6 NM to RW36

PEQHI

2300

BELMY

4 NM Holding Pattern

181° →

← 001°

3000

RW36

1280*

2300

GP 3.00°

TCH 40

1.6 NM

3.2 NM

5.2 NM

CATEGORY	A	B	C	D
LPV DA	986-1 250 (300-1)			
LNAV/VNAV DA	1147-1 ³ / ₈ 411 (500-1 ³ / ₈)			
LNAV MDA	1140-1 404 (500-1)		1140-1 ¹ / ₈ 404 (500-1 ¹ / ₈)	
CIRCLING	1220-1 482 (500-1)	1280-1 542 (600-1)	1380-1 ³ / ₄ 642 (700-1 ³ / ₄)	1420-2 ¹ / ₄ 682 (700-2 ¹ / ₄)