

WAAS

CH 62937

W09A

APP CRS

091°

Rwy Ldg

5001

TDZE

735

Apt Elev

738

RNAV (GPS) RWY 9


RANTOUL NTL AVN CNTR-FRANK ELLIOTT FLD (TIP)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F).
DME/DME RNP-0.3 NA. When local altimeter setting not received, use Champaign Urbana altimeter setting and increase DA 41 feet and all MDA 60 feet; increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅓ mile and Circling Cats C/D visibility ¼ mile. Baro-VNAV and VDP NA when using Champaign Urbana altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3000 direct MEDLE and hold.

AWOS-3 119.025	CHAMPAIGN APP CON ★ 121.35 285.65	UNICOM 123.0 (CTAF) 0
-------------------	--------------------------------------	--------------------------

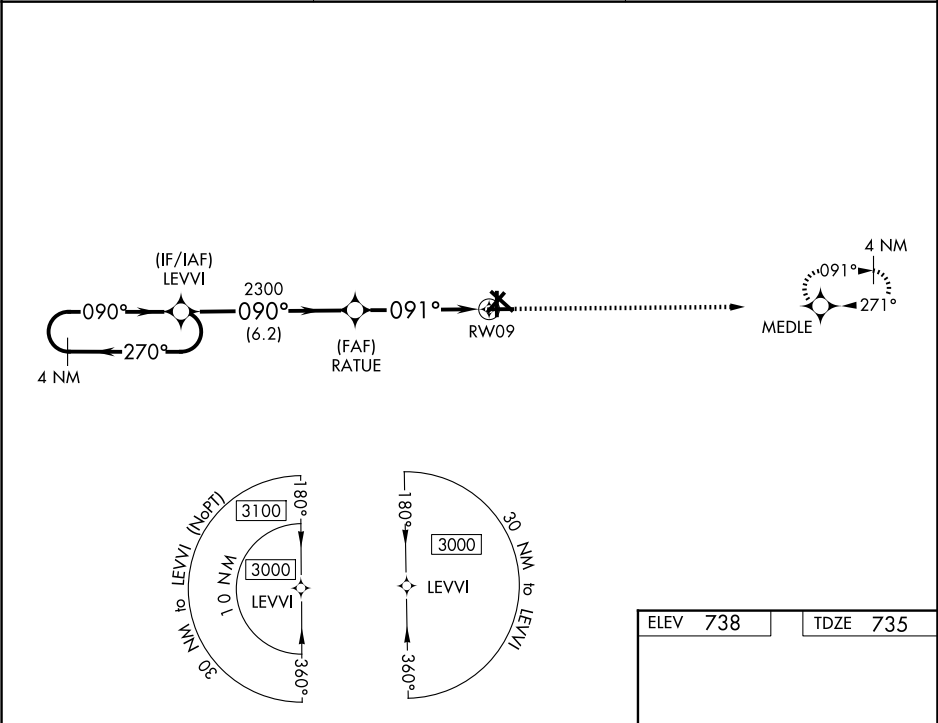

4 NM Holding Pattern

LEVVI

3000

270°

090°

090°

GP 3.00° TCH 40

RATUE

2300

091°

RW09

3000

MEDLE

*1.6 NM to RW09

*LNAV only.

6.2 NM

3.2 NM

1.6 NM

CATEGORY	A	B	C	D
LPV DA	985-1		250 (300-1)	
LNAV/VNAV DA	1167-1½		432 (500-1½)	
LNAV MDA	1280-1 545 (600-1)		1280-1½ 545 (600-1½)	
CIRCLING	1280-1 542 (600-1)		1380-1¾ 642 (700-1¾) 1420-2¼ 682 (700-2¼)	

ELEV 738

TDZE 735

REIL Rwy 9 and 27 0
MIRL Rwy 9-27 and 18-36 0