

WAAS
CH **53344**
W21A

APP CRS
213°

Rwy Ldg
TDZE
Apt Elev

7001
5758
5823


RNAV (GPS) RWY 21

TAYLOR (TYL)

RNP APCH-GPS.
When local altimeter setting not received, procedure NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA
below 26°C or above 54°C.

MISSED APPROACH: Climb to 6300 then climbing
right turn to 8000 direct CAMBA and hold.

AWOS-3PT 119.075	ALBUQUERQUE CENTER 132.9 239.05	UNICOM 122.7 (CTAF) 1
----------------------------	---	---------------------------------

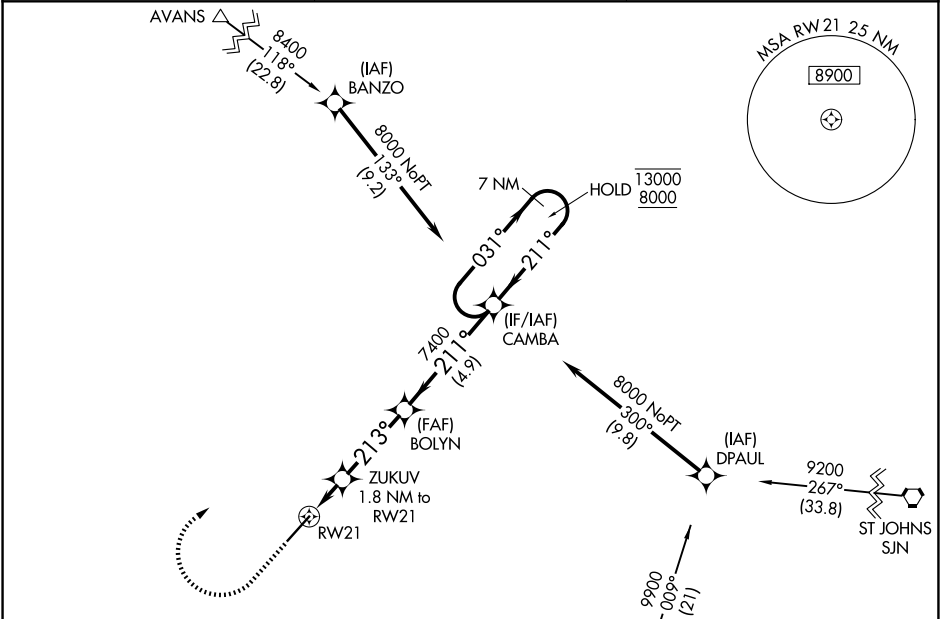

ELEV 5823

TDZE 5758

213°

7001 x 75

1.5% UP

6300

8000

CAMBA

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 43).

CAMBA

7 NM Holding Pattern

ZUKUV 1.8 NM to RWY 21

BOLYN 7400

CAMBA 7400

031°

211°

13000

8000

GP 3.00°

TCH 52

1.3 NM

0.5 NM

3.3 NM

4.9 NM

CATEGORY	A	B	C	D
LPV DA	6008-¾ 250 (200-¾)			
LNAV/VNAV DA	6008-¾ 250 (200-¾)			
LNAV MDA	6180-1 422 (400-1)		6180-1¼ 422 (400-1¼)	
CIRCLING	6320-1 497 (500-1)	6440-1 617 (700-1)	6440-1¾ 617 (700-1¾)	6480-2 657 (700-2)

MIRL Rwy 3-21 1

REIL Rws 3 and 21 1