


WAAS CH 87146 W10A	APP CRS 101°	Rwy Ldg 3900 TDZE 2250 Apt Elev 2250
--	------------------------	---

RNAV (GPS) RWY 10

STANLEY MUNI (Ø8D)

RNP APCH - GPS.	MISSED APPROACH: Climb to 4300 direct EXIHO and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.	

AWOS-3 121.1	MINNEAPOLIS CENTER 127.6 279.6	CTAF 122.9 Ø
------------------------	--	------------------------

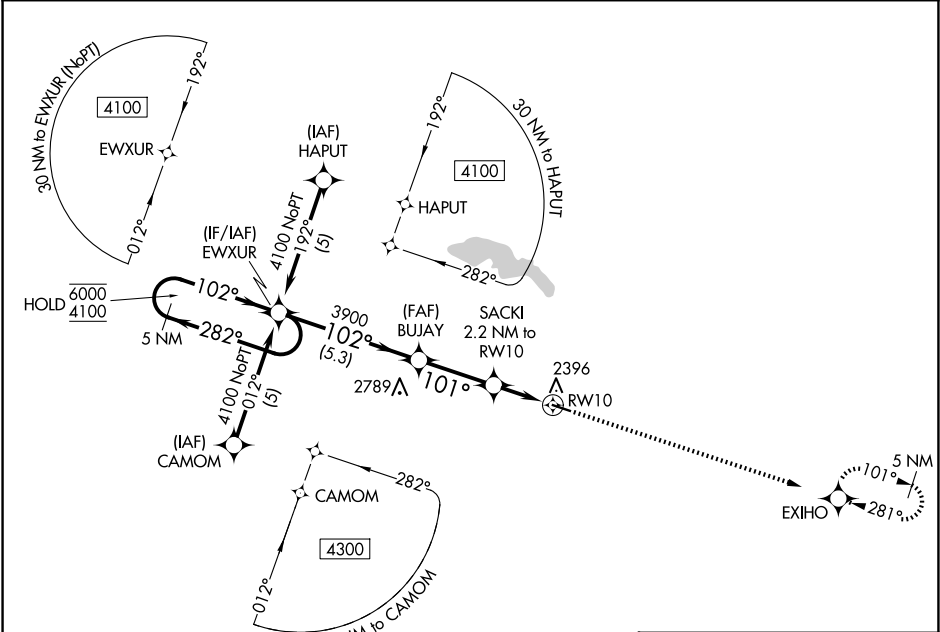

ELEV 2250

TDZE 2250

5 NM Holding Pattern

EWXUR

6000
4100

282°

102°

GP 3.00°
TCH 40

5.3 NM

2.8 NM

1.1 NM

1.2 NM

BUJAY

3900

SACKI

2.2 NM to RWY10

1.2 NM to RWY10

RWY10

4300

EXIHO

101°

281°

5 NM

28

3900.X 60

1185

1120

Ø2

CATEGORY	A	B	C	D
LPV DA	2450-1	200 (200-1)		NA
LNAV/VNAV DA	2538-1	288 (300-1)		NA
LNAV MDA	2660-1	410 (500-1)		NA
CIRCLING	2720-1 470 (500-1)	2940-1 690 (700-1)		NA

MIRL Rwy 10-28 Ø