

WAAS CH 86614 W34A	APP CRS 345°	Rwy Ldg 4798 TDZE 3081 Apt Elev 3086
--	------------------------	---

RNAV (GPS) RWY 34
RONAN (7S0)

T NA	Baro-VNAV NA when using Missoula altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -21°C or above 54°C. Circling NA east of Rwy 16-34. When local altimeter setting not received, use Missoula altimeter setting and increase LPV DA to 3545 and all visibilities % SM, LNAV/VNAV DA to 3545 and all visibilities % SM; and increase all MDAs 120 feet.	MISSED APPROACH: Climb to 13000 direct PEKBE and on track 255° to QATQI and on track 209° to HANIM and hold, continue climb-in-hold to 13000.
----------------------------------	---	--

AWOS-3 119.925	SALT LAKE CITY CENTER 127.075 244.875	AUNICOM 122.8 (CTAF) 0
--------------------------	---	----------------------------------

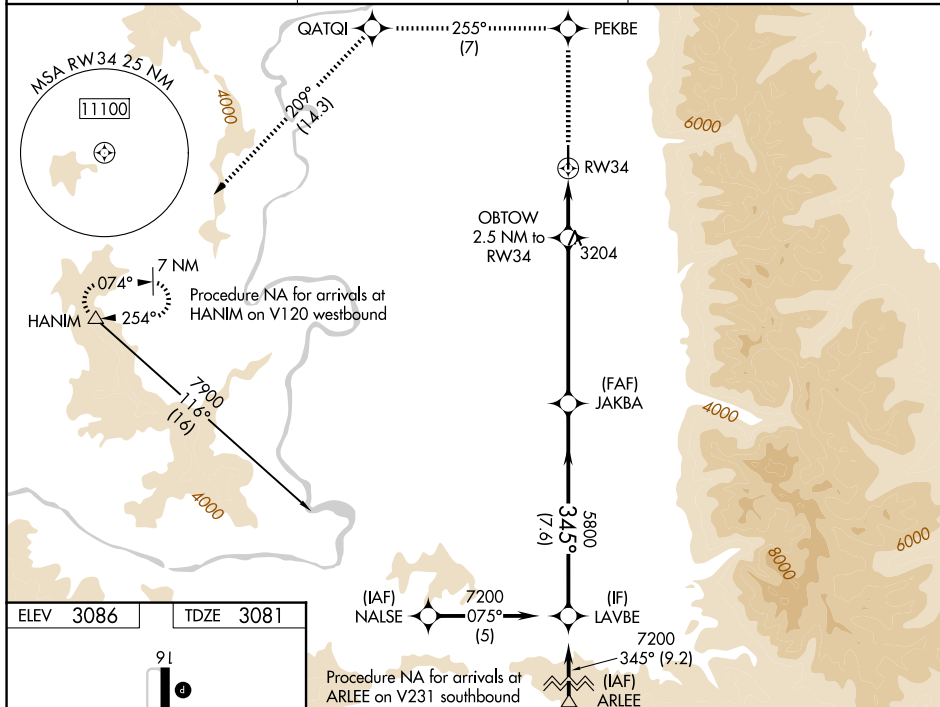


Diagram illustrating the MIRL Rwy 16-34 instrument approach chart. The chart shows a 34-degree heading, a 4798 x 75 runway, and a 3900* obstacle. It includes a table of approach categories and a table of approach procedures.

CATEGORY	A	B	C	D
LPV DA	3438-1	357 (400-1)		NA
LNAV/VNAV DA	3438-1 $\frac{1}{4}$	357 (400-1 $\frac{1}{4}$)		NA
LNAV MDA	3520-1	439 (500-1)		NA
CIRCLING	3560-1	474 (500-1)		NA