

WAAS	APP CRS	Rwy Ldg	6000
CH 90116	013°	TDZE	467
W01A		Apt Elev	488



RNAV (GPS) RWY 1

BEECH RIVER RGNL (PVE)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5° F) or above 54°C (130°F).
DME/DME RNP-0.3 NA. When local altimeter setting not received, use Jackson altimeter setting: increase LPV all Cats DA to 807 and all Cats visibility ¾ mile; increase LNAV/VNAV all Cats DA to 911 and all Cats visibility ¾ mile; increase all MDA 100 feet and LNAV Cats C/D and Circling Cat C visibility ½ mile and Circling Cat D visibility ½ mile. Baro-VNAV and VDP NA when using Jackson altimeter setting.

MISSED APPROACH:
Climb to 3000 direct EYODI and hold.

AWOS-3 118.125	MEMPHIS CENTER 125.85 379.25	UNICOM 123.0 (CTAF) 0
-------------------	---------------------------------	--------------------------

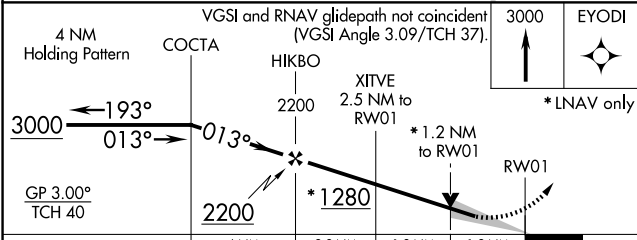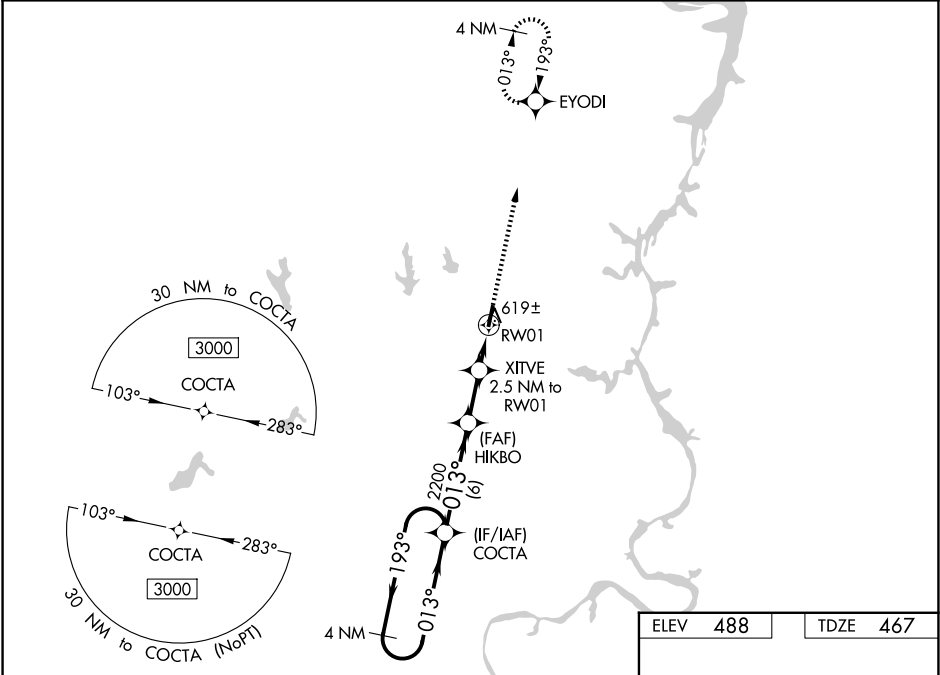

CATEGORY	A	B	C	D
LPV DA	717-7/8	250 (300-7/8)		
LNAV/VNAV DA	821-1 1/4	354 (400-1 1/4)		
LNAV MDA	880-1	413 (400-1)	880-1 1/8	413 (400-1 1/8)
CIRCLING	940-1 452 (500-1)	980-1 492 (500-1)	1000-1 1/2 512 (600-1 1/2)	1200-2 1/4 712 (800-2 1/4)

