

WAAS CH 50133 W11A	APP CRS 105°	Rwy Ldg TDZE 1183 Apt Elev 1183
--	------------------------	---

RNAV (GPS) RWY 11

PAYNESVILLE MUNI (PEX)


RNP APCH - GPS.

⚠

Baro-VNAV and VDP NA when using Lf altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Lf altimeter setting and increase LPV DA to 1434 feet; increase LNAV/VNAV DA to 1704 feet and all visibilities ¼ SM. Increase all MDAs 60 feet and LNAV and Circling visibility Cat C ¼ SM.

MISSED APPROACH:
Climb to 3000 direct UDALE and hold.

AWOS-3PT 120.35	MINNEAPOLIS CENTER 125.5 323.1	CTAF 122.9
---------------------------	--	----------------------

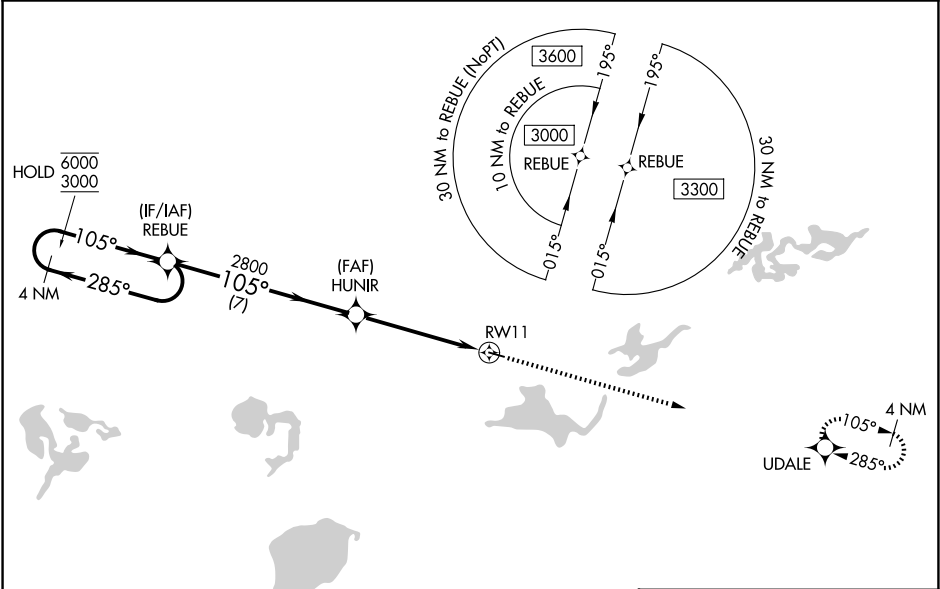

ELEV 1183		TDZE 1183	
4 NM Holding Pattern		3000 UDALE	
6000 ← 285° 3000 → 105°		105° 2800	
GP 3.00° TCH 42		1.4 NM to RW11	
7 NM		3.5 NM	
CATEGORY		RW11	
LPV DA		1383-1 200 (200-1)	
LNAV/VNAV DA		1653-1 470 (500-1)	
LNAV MDA		1680-1 497 (500-1)	
CIRCLING		1680-1 497 (500-1)	
		1760-1 577 (600-1)	
		1920-2 737 (800-2)	
		NA	

NC-1, 06 AUG 2026 to 03 SEP 2026

NC-1, 06 AUG 2026 to 03 SEP 2026