WAAS CH 65633 W29A	APP CRS 285°	Rwy Ldg 3302 TDZE 1183 Apt Elev 1183

RNAV (GPS) RWY 29
PAYNESVILLE MUNI (PEX)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using LJF altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter not received, use LJF altimeter setting and increase LPV DA to 1434 feet; increase LNAV/VNAV DA to 1771 feet and all visibilities ¼ SM. Increase all MDAs 60 feet and LNAV and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct REBUE and hold.

AWOS-3PT	MINNEAPOLIS CENTER	CTAF
120.35	125.5 323.1	122.9 L

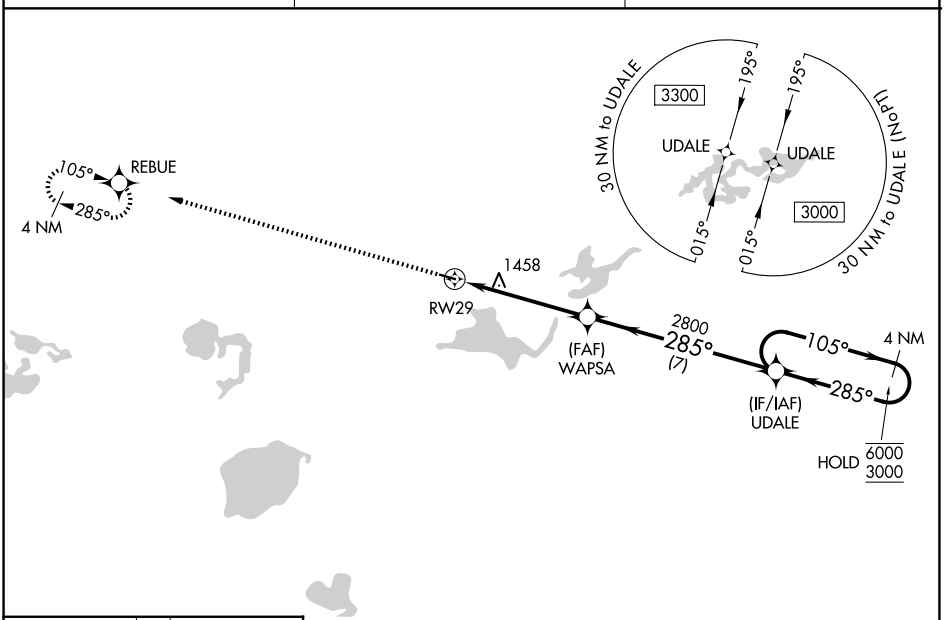

ELEV 1183 TDZE 1183

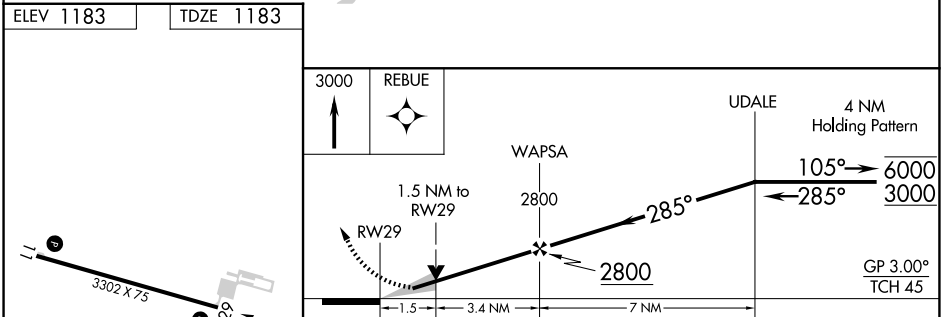

CATEGORY	A	B	C	D
LPV DA	1383-1 200 (200-1)			NA
LNAV/VNAV DA	1720-1½ 537 (600-1½)			NA
LNAV MDA	1720-1 537 (600-1)		1720-1½ 537 (600-1½)	NA
CIRCLING	1720-1 537 (600-1)	1760-1 577 (600-1)	1920-2 737 (800-2)	NA

MIRL Rwy 11-29 L
REIL Rwys 11 and 29 L

NC-1, 06 AUG 2026 to 03 SEP 2026
NC-1, 06 AUG 2026 to 03 SEP 2026