

|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>70338</b><br><b>W04A</b> | APP CRS<br><b>040°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>2999</b><br><b>1371</b><br><b>1371</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|


RNAV (GPS) RWY 4

MC CREARY COUNTY (18I)

DME/DME RNP-0.3 NA. Procedure NA at night. Helicopter visibility reduction below 1 SM NA. Use Williamsburg altimeter setting, when not received use London altimeter setting and increase all MDA 40 feet and increase LP and LNAV Cat C visibility ½ mile, increase Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 4000 direct CRORE and hold.

|                                               |                                  |
|-----------------------------------------------|----------------------------------|
| INDIANAPOLIS CENTER<br><b>124.625 371.925</b> | UNICOM<br><b>123.05 (CTAF) 0</b> |
|-----------------------------------------------|----------------------------------|

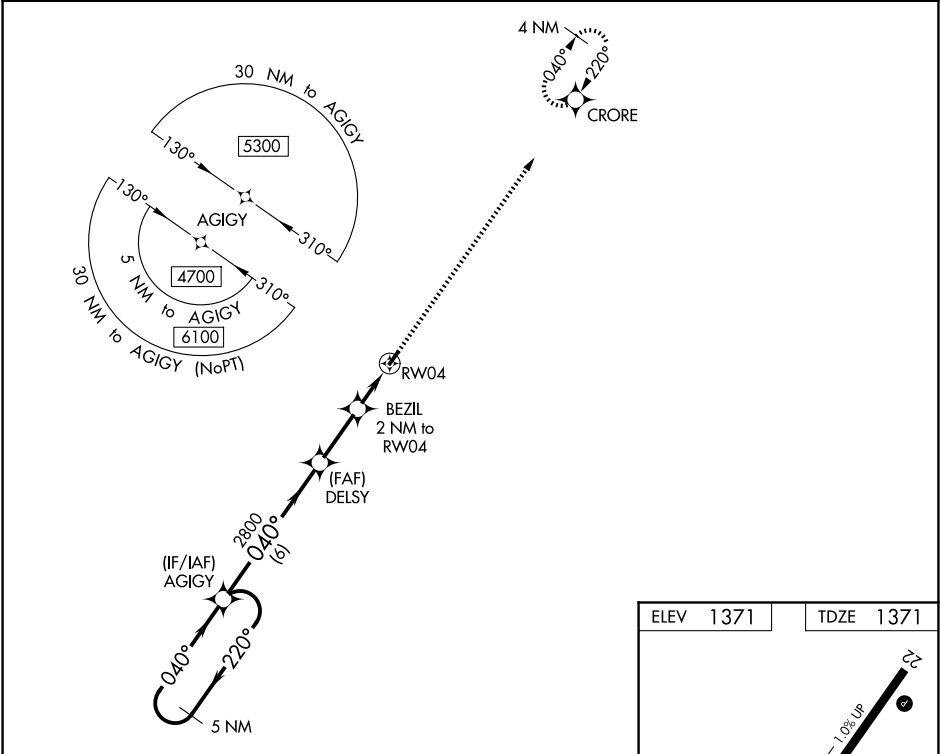

|                      |                       |                             |                               |                    |       |
|----------------------|-----------------------|-----------------------------|-------------------------------|--------------------|-------|
| 5 NM Holding Pattern |                       | Visual Segment - Obstacles. |                               | 4000               | CRORE |
| AGIGY                |                       | DELSY                       |                               | BEZIL 2 NM to RW04 | RW04  |
| 4700 ← 040°          |                       | 2800                        |                               | 2040               |       |
| → 220°               |                       | 6 NM                        |                               | 2.4 NM             | 2 NM  |
| CATEGORY             | A                     | B                           | C                             | D                  |       |
| LP MDA               | 1920-1                | 549 (600-1)                 | 1920-1 5/8<br>549 (600-1 1/8) | NA                 |       |
| LNAV MDA             | 1940-1                | 569 (600-1)                 | 1940-1 5/8<br>569 (600-1 1/8) | NA                 |       |
| CIRCLING             | 1940-1<br>569 (600-1) | 2000-1<br>629 (700-1)       | 2020-1 3/4<br>649 (700-1 3/4) | NA                 |       |

