

APP CRS 218°	Rwy Ldg TDZE Apt Elev	13502 3606 3607
------------------------	-----------------------------	--

RNAV (RNP) Z RWY 22
RICK HUSBAND AMARILLO INTL (AMA)


T For uncompensated Baro-VNAV systems, procedure NA below -1.4°C (7°F) or above 52°C (125°F). RF required. GPS required. For inop ALS, increase RNP 0.14 all Cats visibility to $\frac{7}{8}$ SM and increase RNP 0.30 all Cats visibility to $1\frac{1}{8}$ SM.

MALSR




MISSED APPROACH: (Do not exceed 185 K until FIMVI) Climb to 5400 on track 218° to WEBVI, left turn to FIMVI, then track 070° to CAUDE and hold.

ATIS	AMARILLO APP CON*	AMARILLO TOWER*	GND CON	CLNC DEL	UNICOM
118.85 350.3	119.5 307.0	118.3(CTAF) 0 257.9	121.9 348.6	121.65 239.275	122.95

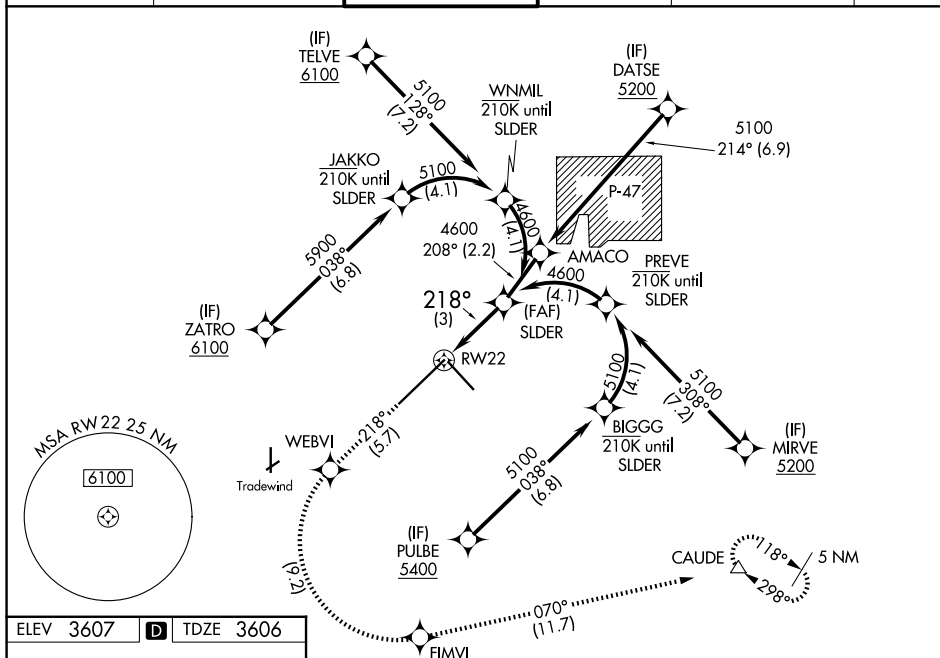

ELEV 3607	D	TDZE 3606
-----------	----------	-----------

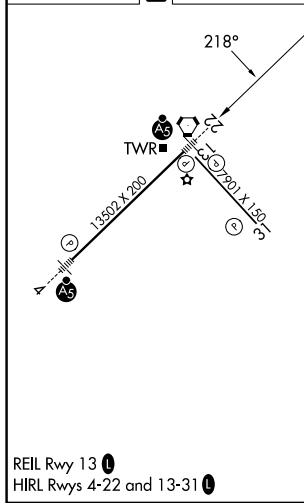

RNAV 1 - GPS or RADAR REQUIRED				
VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 77).				
5400 ↑ tr 218°	WEBVI 		FIMVI 	CAUDE tr 070°
See planview for multiple IF locations.				
CATEGORY	A	B	C	D
RNP 0.14 DA	3884- $\frac{1}{2}$ 278 (300- $\frac{1}{2}$)			
RNP 0.30 DA	3958- $\frac{3}{4}$ 352 (400- $\frac{3}{4}$)			
AUTHORIZATION REQUIRED				