

WAAS CH 57919 W13A	APP CRS 129°	Rwy Ldg TDZE Apt Elev	7901 3603 3607
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 13
RICK HUSBAND AMARILLO INTL (AMA)


RNP APCH.

 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C.


ASR

MISSED APPROACH: Climb to 5400 direct PAMPE and on track 105° to CAUDE and hold.

ATIS 118.85 350.3	AMARILLO APP CON★ 119.5 307.0	AMARILLO TOWER★ 118.3(CTAF) 257.9	GND CON 121.9 348.6	CLNC DEL 121.65 239.275	UNICOM 122.95
-----------------------------	---	---	-------------------------------	-----------------------------------	-------------------------

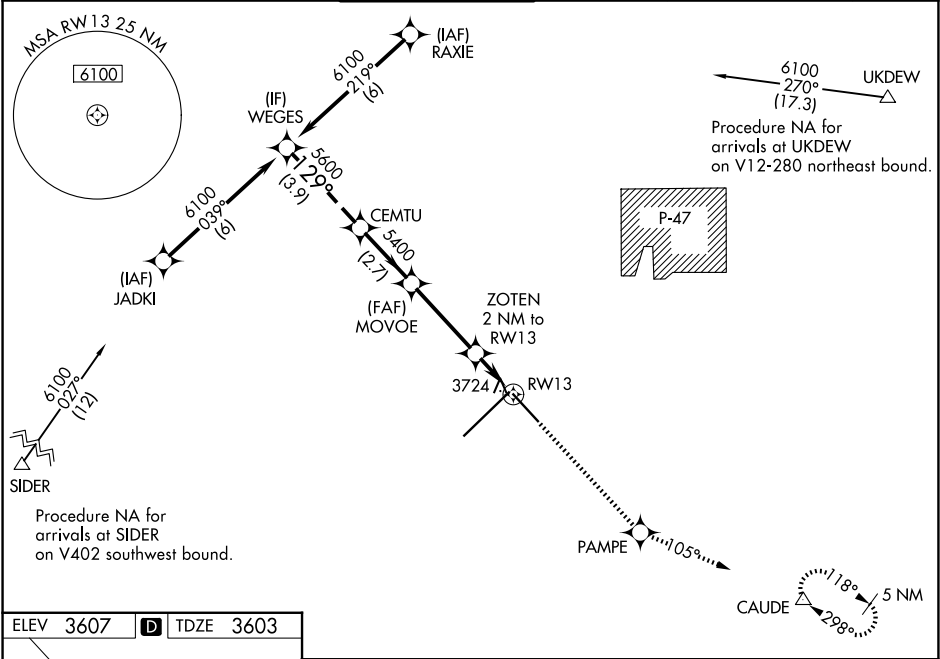

ELEV 3607	D	TDZE 3603
-----------	----------	-----------

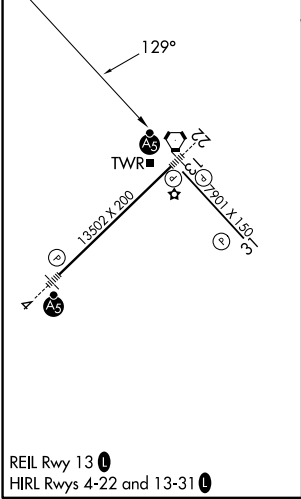

	WEGES	CEMTU	MOVVOE	ZOTEN 2 NM to RW13	PAMPE	CAUDE
	6100	5600	5400	*4280	5400	tr 105°
	Procedure Turn NA			*1 NM to RW13		
	GP 3.00°					
	TCH 52					
	3.9 NM	2.7 NM	3.4 NM	1 NM	1 NM	
CATEGORY	A	B	C	D		
LPV DA	3803-3/4 200 (200-3/4)					
LNAV/VNAV DA	3976-1 1/4 373 (400-1 1/4)					
LNAV MDA	3980-1 377 (400-1)					3980-1 1/4 377 (400-1 1/4)
CIRCLING	4080-1 473 (500-1)		4240-1 3/4 633 (700-1 3/4)		4280-2 1/4 673 (700-2 1/4)	