
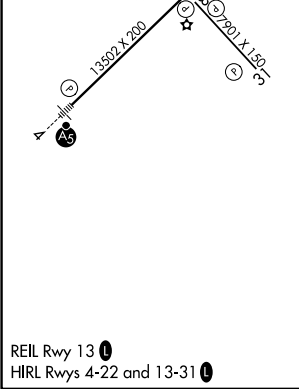


WAAS CH 50447 W22A	APP CRS 214°	Rwy Ldg TDZE Apt Elev	13502 3606 3607
--	------------------------	-----------------------------	--

RNAV (GPS) Y RWY 22
RICK HUSBAND AMARILLO INTL (AMA)

RNP APCH - GPS.			MALSR 	MISSED APPROACH: Climb to 4020 then climbing left turn to 5000 direct CAUDE and hold.	
 ASR	For inop ALS, increase LP Cats A/B visibility to 1 SM and Cats C/D/E to ½ SM. Increase LNAV Cats A/B visibility to 1 SM and Cats C/D/E to 1½ SM.				
ATIS 118.85 350.3	AMARILLO APP CON ★ 119.5 307.0	AMARILLO TOWER ★ 118.3(CTAF) 0 257.9	GND CON 121.9 348.6	CLNC DEL 121.65 239.275	UNICOM 122.95

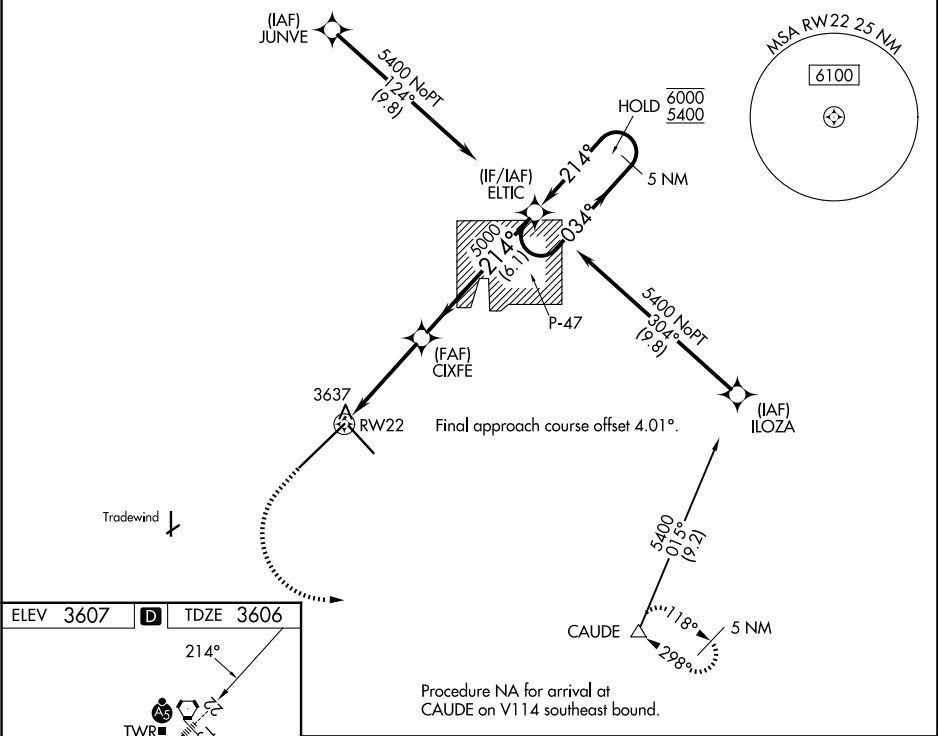

4020	5000	CAUDE	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 77).		5 NM Holding Pattern
		ELTIC			
RW22		0.7 NM to RW22	3.07° TCH 50	0.7 NM	3.5 NM
		5000	214°	034°	6000 5400
CATEGORY	A	B	C	D	E
LP MDA	3900-¾		294 (300-¾)		
LNAV MDA	4020-¾		414 (500-¾)		
CIRCLING	4080-1	473 (500-1)	4240-¾ 633 (700-1¾)	4280-2¼ 673 (700-2¼)	4460-3 853 (900-3)

SC-2, 03 SEP 2026 to 01 OCT 2026

SC-2, 03 SEP 2026 to 01 OCT 2026