

WAAS CH 86332 W06A	APP CRS 060°	Rwy Ldg TDZE Apt Elev	4601 2563 2573
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6

BIG SPRING/MC MAHON-WRINKLE (BPG)

RNP APCH.

▼


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.

When local altimeter setting not received, use Midland Intl Air and Space Port altimeter setting and increase all DA 130 feet, all MDA 140 feet, and increase LPV all Cats visibility ¾ mile and LNAV/VNAV all Cats visibility ½ mile. Baro-VNAV and VDP NA with Midland Intl Air and Space Port altimeter setting.

MISSED APPROACH: Climb to 4600 direct ZARDU and hold.

AWOS-3PT 118.025	FORT WORTH CENTER 133.7 350.2	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

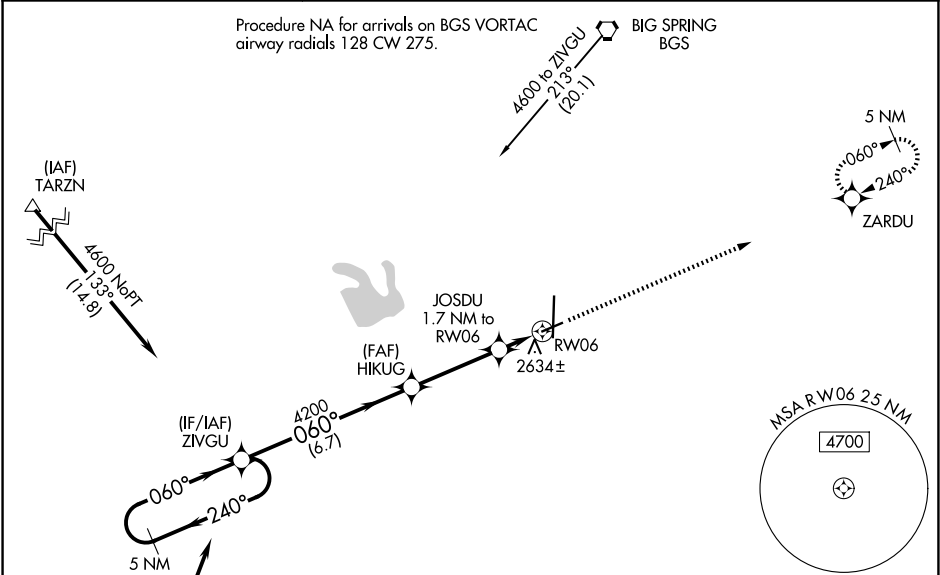

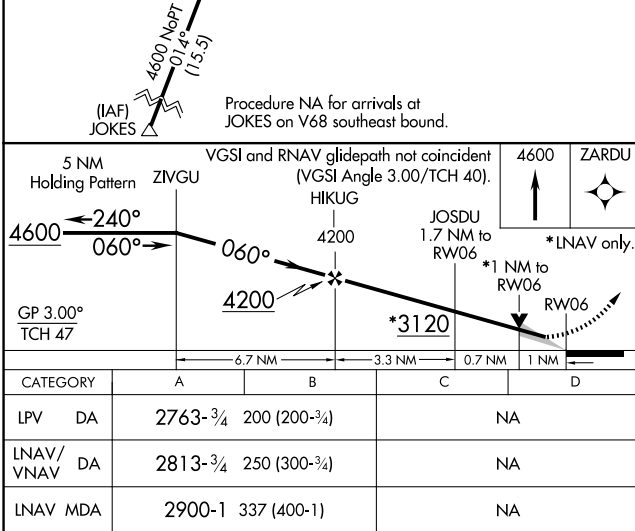


Diagram illustrating the arrival procedure for JOKES on V68 southeast bound. The procedure is NA for arrivals at JOKES on V68 southeast bound.

Key locations and distances:

- 5 NM Holding Pattern at 4600 (ZINGU)
- GP 3.00° TCH 47
- 4600 (ZARDU)
- 4200 (HIKUG)
- JOSDU 1.7 NM to RW06
- *1 NM to RW06
- *3120
- RW06
- Distances: 6.7 NM, 3.3 NM, 0.7 NM, 1 NM
- Angles: 240°, 060°, 060°
- Procedure NA for arrivals at JOKES on V68 southeast bound.
- VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 40).
- *LNAV only.

CATEGORY	A	B	C	D
LPV DA	2763-¾	200 (200-¾)		NA
LNAV/VNAV DA	2813-¾	250 (300-¾)		NA
LNAV MDA	2900-1	337 (400-1)		NA

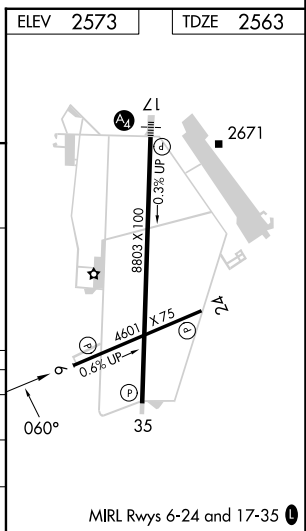


Diagram illustrating the arrival procedure for JOKES on V68 southeast bound. The procedure is NA for arrivals at JOKES on V68 southeast bound.

Key locations and distances:

- 5 NM Holding Pattern at 4600 (ZINGU)
- GP 3.00° TCH 47
- 4600 (ZARDU)
- 4200 (HIKUG)
- JOSDU 1.7 NM to RW06
- *1 NM to RW06
- *3120
- RW06
- Distances: 6.7 NM, 3.3 NM, 0.7 NM, 1 NM
- Angles: 240°, 060°, 060°
- Procedure NA for arrivals at JOKES on V68 southeast bound.
- VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 40).
- *LNAV only.

CATEGORY	A	B	C	D
LPV DA	2763-¾	200 (200-¾)		NA
LNAV/VNAV DA	2813-¾	250 (300-¾)		NA
LNAV MDA	2900-1	337 (400-1)		NA

MRL Rwy 6-24 and 17-35