

LOC I-SYD 111.3	APP CRS 032°	Rwy Ldg TDZE 5328 Apt Elev 5344
---------------------------	------------------------	---


ILS or LOC RWY 3


CASPER/NATRONA COUNTY INTL (CPR)

⚠ DME from DDY VOR/DME. Simultaneous reception of I-SYD and DDY DME required. When local alimeter setting not received, use Douglas alimeter setting and increase DA to 5697 feet and all MDAs 180 feet, increase S-ILS visibility all Cats ¼ SM and S-LOC visibility Cat B, C, D and Circling Cats B, C, D visibility ½ SM, increase MAMUE FIX MINIMUM Circling visibility Cat C ½ SM and Cat D ¼ SM. For inoperative MALSR when using Douglas alimeter setting increase S-ILS visibility all Cats to 1½ mile. MAMUE FIX MINIMUMS: For inoperative MALSR, increase S-LOC visibility Cats C, and D to 1½ mile. #RVFR 1800 authorized with use of FD or AP or HUD to DA.

MALSR  **MISSED APPROACH:** Climb to 7500 then left turn direct DDY VOR/DME and hold.

ATIS 126.15	CASPER APP CON ★ 120.65 354.1	CASPER TOWER ★ 118.3 (CTAF) 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

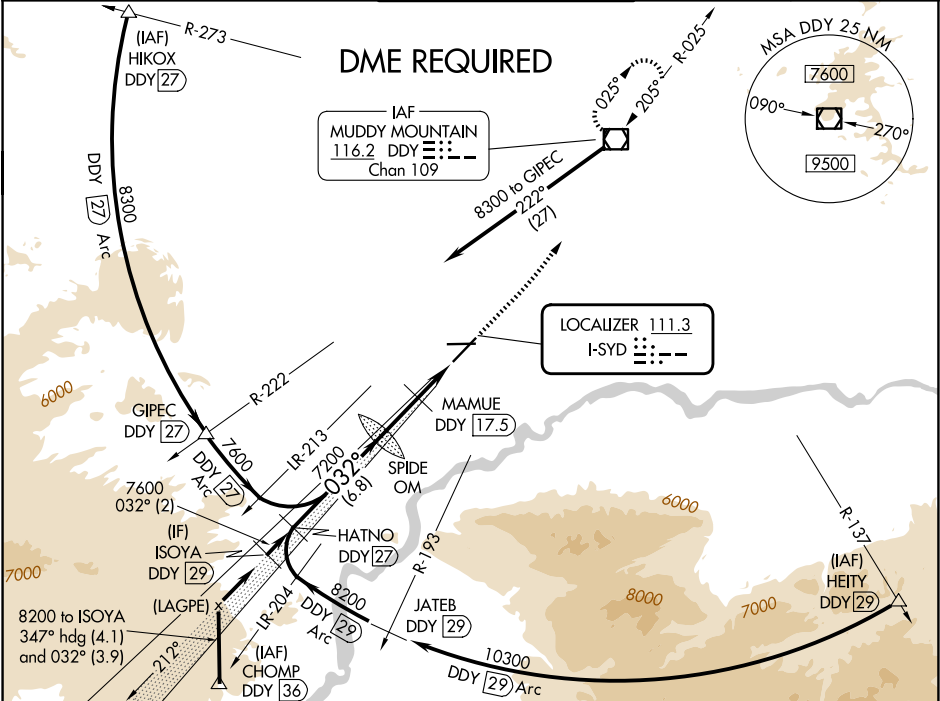

ISOYA *6400 when using Douglas alimeter setting. DDY (29) HATNO DDY (27) SPIDE OM MAMUE DDY (17.5) DDY (14.7) *LOC only					ELEV 5344 D TDZE 5328
					
GS 3.00° TCH 50					REIL Rwy 21 1
CATEGORY	A		B	C	D
S-ILS 3#	5528/24 200 (200-½)				
S-LOC 3	6220/40 892 (900-¾)		6220-2 892 (900-2)		
CIRCLING	6220-1¼ 876 (900-1¼)		6220-2½ 876 (900-2½)		6220-2¾ 876 (900-2¾)
MAMUE FIX MINIMUMS					
S-LOC 3	5740/24 412 (400-½)		5740/40 412 (400-¾)		
CIRCLING	5740-1 396 (400-1) 5800-1 456 (500-1)		5860-1½ 516 (600-1½)		6200-2¾ 856 (900-2¾)
FAF to MAP 5.6 NM					
Knots	60 90 120 150 180				
Min:Sec	5:36 3:44 2:48 2:14 1:52				

NW-1, 03 SEP 2026 to 01 OCT 2026

NW-1, 03 SEP 2026 to 01 OCT 2026