

BATTA ONE DEPARTURE (RNAV)
(BATTA1 .BATTA) 03SEP26

CHARLOTTE, NORTH CAROLINA
CHARLOTTE/DOUGLAS INTL (CLT)

CHARLOTTE DEP CON
124.0 307.8
D-ATIS DEP
132.1
CLNC DEL
127.15 348.6
CPDLC
GND CON
121.8 348.6 (W)
121.9 348.6 (E)
CHARLOTTE TOWER
118.1 257.8 (18-36)
126.4 257.8 (1R-19L)
133.35 257.8 (1L-19R)




RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

TOP ALTITUDE:
8000

NOTE: Turbojet only.
NOTE: Maintain 250K until reaching 10000 MSL, then maintain 280K.

TAKEOFF MINIMUMS

Rwys 1R, 18, 19L/R, 36: Standard with minimum climb of 500'/NM to 1260.
Rwy 1L: Standard with minimum climb of 500'/NM to 1400.

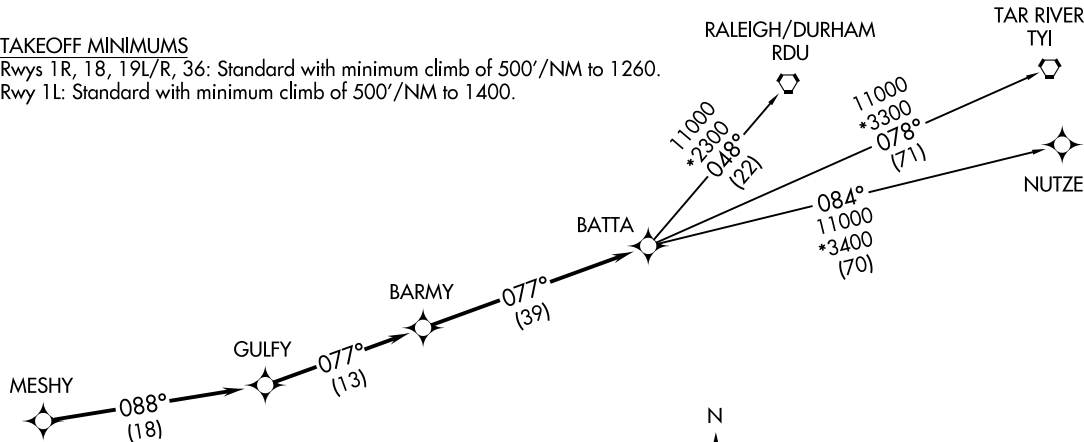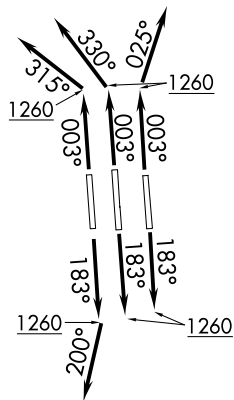

(CONTINUED ON FOLLOWING PAGE)

(BATTA1 .BATTA) 26246
BATTA ONE DEPARTURE (RNAV)

AL-78 (FAA)

CHARLOTTE/DOUGLAS INTL (CLT)
CHARLOTTE, NORTH CAROLINA



DEPARTURE ROUTE DESCRIPTION
SEE ADDITIONAL REQUIREMENTS ON AAUP

TAKEOFF RUNWAY 1L: Climb on heading 003° to 1260, then on heading 315° for vectors to MESHY, thence. . .
TAKEOFF RUNWAY 1R: Climb on heading 003° to 1260, then on heading 330° for vectors to MESHY, thence. . .
TAKEOFF RUNWAYS 18, 19L: Climb on heading 183° to 1260, for vectors to MESHY, thence. . .
TAKEOFF RUNWAY 19R: Climb on heading 183° to 1260, then on heading 200° for vectors to MESHY, thence. . .
TAKEOFF RUNWAY 36: Climb on heading 003° to 1260, then on heading 025° for vectors to MESHY, thence. . .

. . .on depicted route to BATT A, then on assigned transition. Maintain 8000.
Expect filed altitude 10 minutes after departure.

- NUTZE TRANSITION (BATT A1 .NUTZE)
- RALEIGH/DURHAM TRANSITION (BATT A1 .RDU)
- TAR RIVER TRANSITION (BATT A1 .TYI)

SE-2, 03 SEP 2026 to 01 OCT 2026

SE-2, 03 SEP 2026 to 01 OCT 2026