
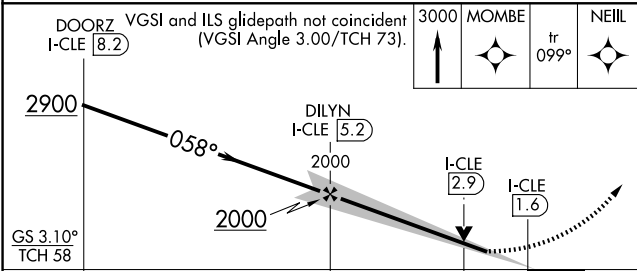


LOC/DME I-CLE 111.9 Chan 56	APP CRS 058°		6R	6L
		Rwy Ldg	8029	9000
		TDZE	777	773
		Apt Elev	800	800


ILS or LOC RWY 6R
CLEVELAND-HOPKINS INTL (CLE)

RNP APCH - GPS.		Rwy 6R MALSR	Rwy 6L ALSF-2	MISSED APPROACH: Climb to 3000 direct MOMBE and on track 099° to NEIL and hold.
⚠ Circling Rwy 10 NA at night. Simultaneous approach authorized. Simultaneous operations require use of vertical guidance; maintain last assigned altitude until established on glideslope. Inop table does not apply to Sidestep 6L. For inop ALS, increase S-LOC 6R Cats C/D visibility to 1½ SM.		AS	A	

D-ATIS	CLEVELAND APP CON	CLEVELAND TOWER	GND CON
127.85	126.55 346.325	124.5 273.45	121.7 273.45

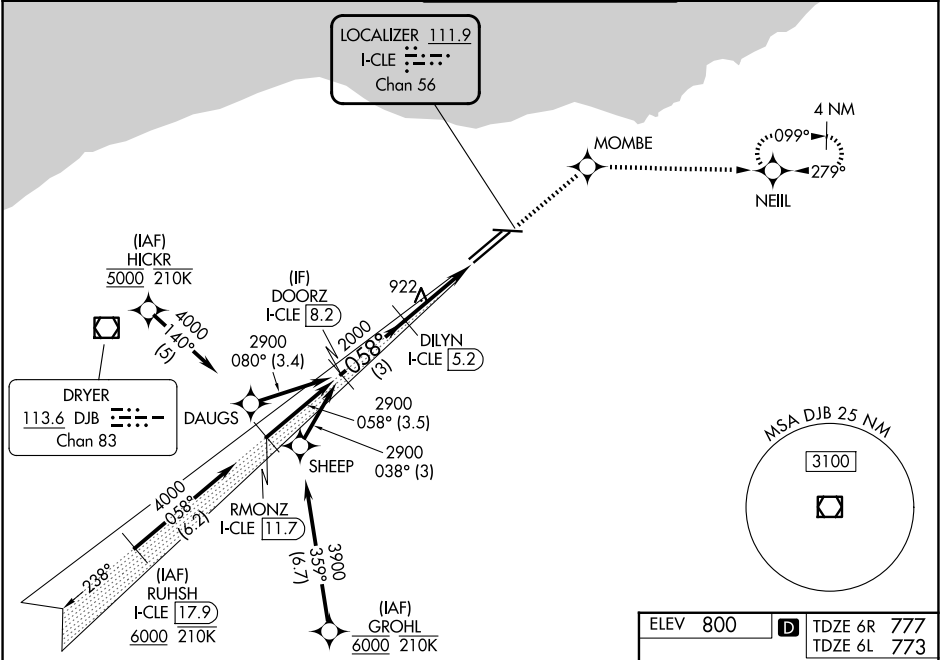

ELEV 800	TDZE 6R 777
	TDZE 6L 773



CATEGORY	A	B	C	D
S-ILS 6R	977/18		200 (200-½)	
S-LOC 6R	1260/24	483 (500-½)	1260/50	483 (500-1)
SIDESTEP 6L	1260-1½		487 (500-1½)	1260-2 487 (500-2)
CIRCLING	1420-1	620 (700-1)	1420-1¾ 620 (700-1¾)	1420-2 620 (700-2)

REIL Rwy 10
TDZ/CL Rwy 6L, 6R, 24L and 24R
HIRL Rwy 6L-24R, 6R-24L and 10-28

EC-2, 03 SEP 2026 to 01 OCT 2026

EC-2, 03 SEP 2026 to 01 OCT 2026