
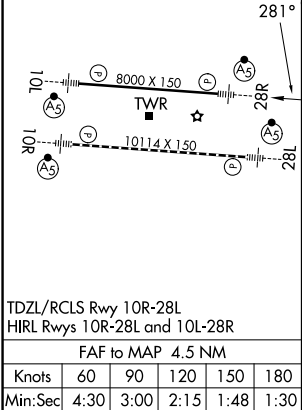


LOC/DME I-ONB 109.1 Chan 28	APP CRS 281°	Rwy Ldg 8000 TDZE 813 Apt Elev 815
---	------------------------	---

ILS or LOC RWY 28R
JOHN GLENN COLUMBUS INTL (CMH)

DME or RADAR required.	MALSR	MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 direct APE VORTAC and hold.
Simultaneous approach authorized. Autopilot coupled approach NA. For inop ALS, increase S-LOC 28R Cat C/D visibility to 1½ SM.		

D-ATIS 124.6	COLUMBUS APP CON 125.95 371.975	COLUMBUS TOWER 132.7 257.8	GND CON 121.9 348.6
------------------------	---	--------------------------------------	-------------------------------

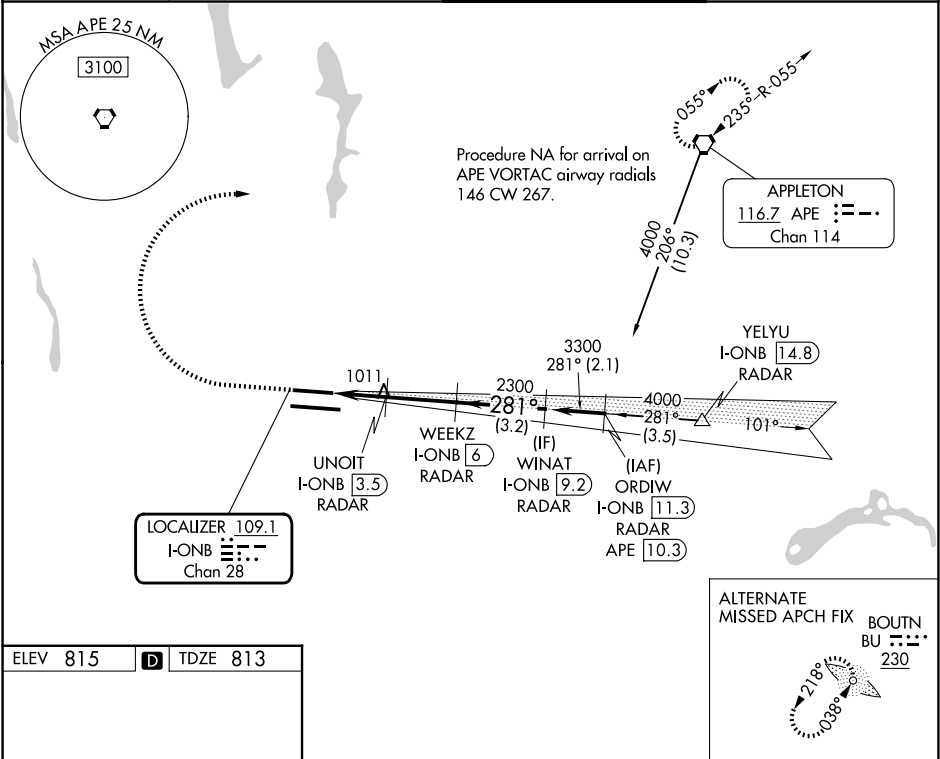

ELEV 815	D	TDZE 813
1400	3000	APE
WEEKZ I-ONB 6	WINAT I-ONB 9.2	
UNOIT I-ONB 3.5		
I-ONB 1.5	I-ONB 2.8	
1.3 NM	0.7 NM	2.5 NM
3.2 NM		
CATEGORY	A	B
S-ILS 28R	1013/24	200 (200-½)
S-LOC 28R	1280/24	467 (500-½)
CIRCLING	1340-1	525 (600-1)
		1520-2
		705 (800-2)
		1520-2¼
		705 (800-2¼)

EC-2, 03 SEP 2026 to 01 OCT 2026

EC-2, 03 SEP 2026 to 01 OCT 2026