

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>72602</b><br><b>W13A</b> | APP CRS<br><b>131°</b> | Rwy Ldg<br>TDZE <b>922</b><br>Apt Elev <b>958</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 13

DES MOINES INTL (DSM)

⚠



⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.  
For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000 and LNAV Cats C and D visibility to RVR 4500.  
# RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct CYCLN and hold.

|                       |                                           |                                        |                               |
|-----------------------|-------------------------------------------|----------------------------------------|-------------------------------|
| ATIS<br><b>119.55</b> | DES MOINES APP CON<br><b>123.9 307.15</b> | DES MOINES TOWER<br><b>118.3 257.8</b> | GND CON<br><b>121.9 348.6</b> |
|-----------------------|-------------------------------------------|----------------------------------------|-------------------------------|

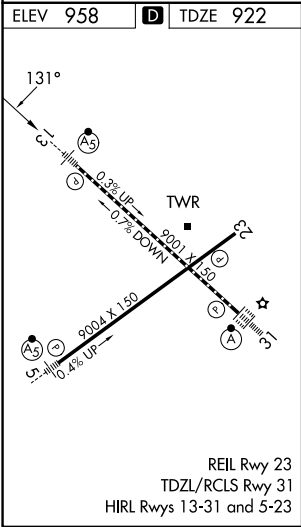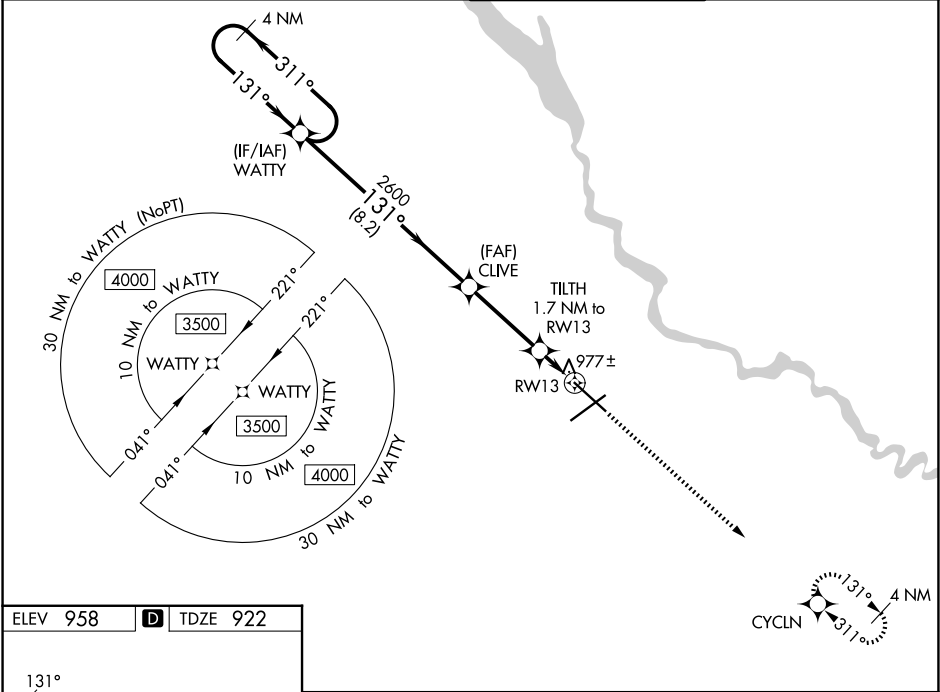

|              |                      |             |                         |                         |
|--------------|----------------------|-------------|-------------------------|-------------------------|
|              | WATTY                | CLIVE       | TILTH                   |                         |
|              | 4 NM Holding Pattern |             | 1.7 NM to RW13          |                         |
|              | 3500                 | 2600        | *1500                   |                         |
|              | GP 3.00° TCH 56      |             | *0.9 NM to RW13         |                         |
|              | 8.2 NM               | 3.4 NM      | 0.8 NM                  | 0.9 NM                  |
| CATEGORY     | A                    | B           | C                       | D                       |
| LPV DA#      | 1122/24 200 (200-½)  |             |                         |                         |
| LNAV/VNAV DA | 1172/24 250 (300-½)  |             |                         |                         |
| LNAV MDA     | 1240/24 318 (300-½)  |             |                         |                         |
| CIRCLING     | 1420-1               | 462 (500-1) | 1600-1¾<br>642 (700-1¾) | 1760-2½<br>802 (900-2½) |