


APP CRS	Rwy Ldg	12003
216°	TDZE	637
	Apt Elev	645

RNAV (RNP) X RWY 22L


DETROIT METRO WAYNE COUNTY (DTW)

RNP AR APCH.		MALSR	MISSED APPROACH: Climb to 4000 direct HWLER and hold.
For uncompensated Baro-VNAV systems, procedure NA below -10°C (14°F) or above 54°C (130°F). Simultaneous approach authorized. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 6000.			
D-ATIS	DETROIT APP CON	METRO TOWER	GND CON
133.675	124.05 284.0	128.125 317.725	121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)

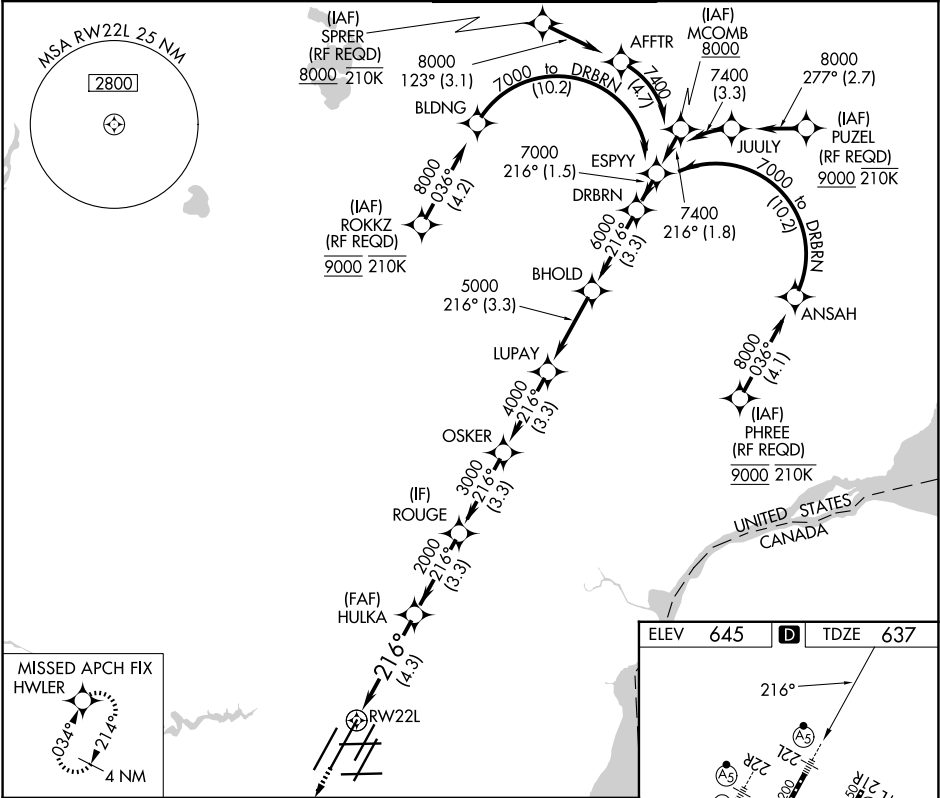

4000	HWLER	DRBRN
RW22L	HULKA	ROUGE
	2000	3000
		4000
		5000
		6000
		7000
		GP 2.85°
		TCH 60
		4.3 NM
		3.3 NM
		3.3 NM
		3.3 NM
		3.3 NM
		3.3 NM
CATEGORY	A	B
RNP 0.15 DA	941/24	304 (300-1/2)
RNP 0.30 DA	1040/40	403 (400-3/4)

AUTHORIZATION REQUIRED

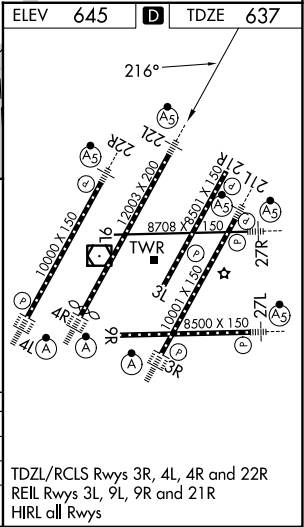

EC-1, 03 SEP 2026 to 01 OCT 2026

EC-1, 03 SEP 2026 to 01 OCT 2026