

APP CRS
265°

Rwy Ldg
TDZE
Apt Elev

9025
3962
3962

RNAV (RNP) Z RWY 26L
EL PASO INTL (ELP)


ASR

For uncompensated Baro-VNAV systems, procedure NA below -8°C (18°F) or above 50°C (122°F). For inop MALS, increase RNP 0.30 visibility all Cats to 1 mile. GPS required.

MALS

MISSED APPROACH: Climb to 4400, then climbing right turn to 7500 direct FABAN and hold.

D-ATIS 120.0 254.3	EL PASO APP CON 124.25 298.85	EL PASO TOWER 118.3 239.275	GND CON 121.9 348.6
-----------------------	----------------------------------	--------------------------------	------------------------

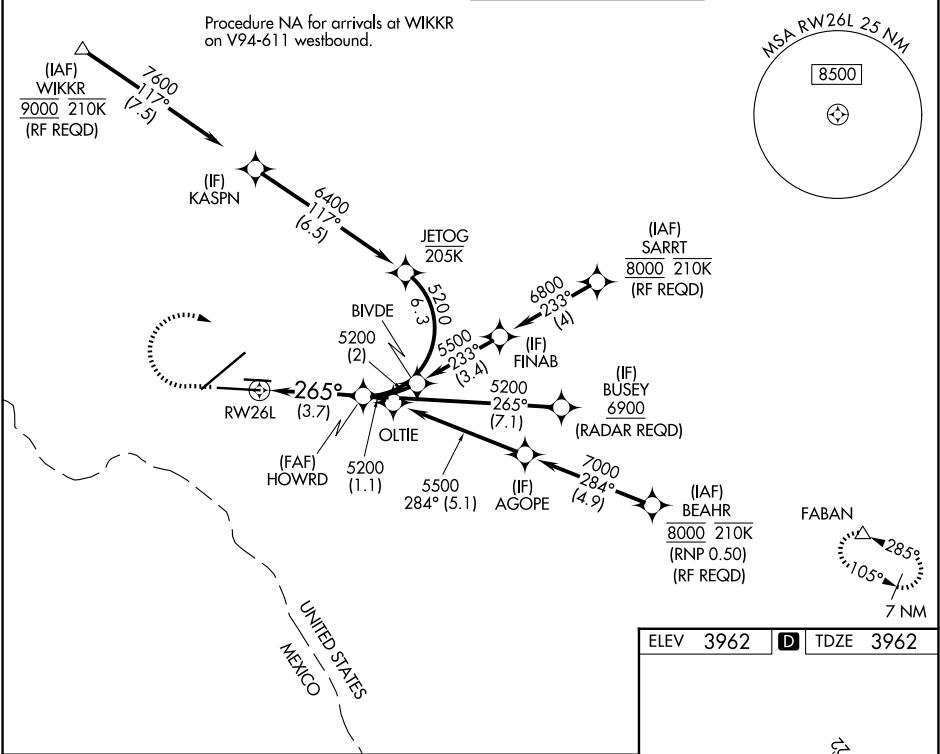

4400 7500 FABAN

VGSI and glidepath not coincident (VGSI Angle 3.00/TCH 75).

See planview for multiple IF locations.

RW26L

HOWRD

5200

GP 3.00° TCH 55

3.7 NM

265°

26L

265°

12620 X 150

0.3% DOWN

5499 X 75

9025 X 150

0.5% UP

0.3% DOWN

TWR

26L

265°

CATEGORY	A	B	C	D
RNP 0.30 DA		4275-½	313 (400-½)	

AUTHORIZATION REQUIRED

MIRL Rwy 8L-26R
REIL Rwy 4 and 8R
HIRL Rwy 4-22 and 8R-26L