


WAAS CH 61310 W27A	APP CRS 273°	Rwy Ldg TDZE 139 Apt Elev 147
--	------------------------	---

RNAV (GPS) RWY 27

FLORENCE RGNL (FLO)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2200 direct IMOVE and hold, continue climb-in-hold to 2200.
▼ Circling Rwy 1, 19 NA at night. ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C.	

ATIS 123.625	FLORENCE APP CON★ 118.6 341.7 (256°-074°) 135.25 316.15 (075°-255°)	FLORENCE TOWER★ 125.1 (CTAF) 353.85	GND CON 121.9 353.85	UNICOM 122.95
------------------------	---	--	--------------------------------	-------------------------

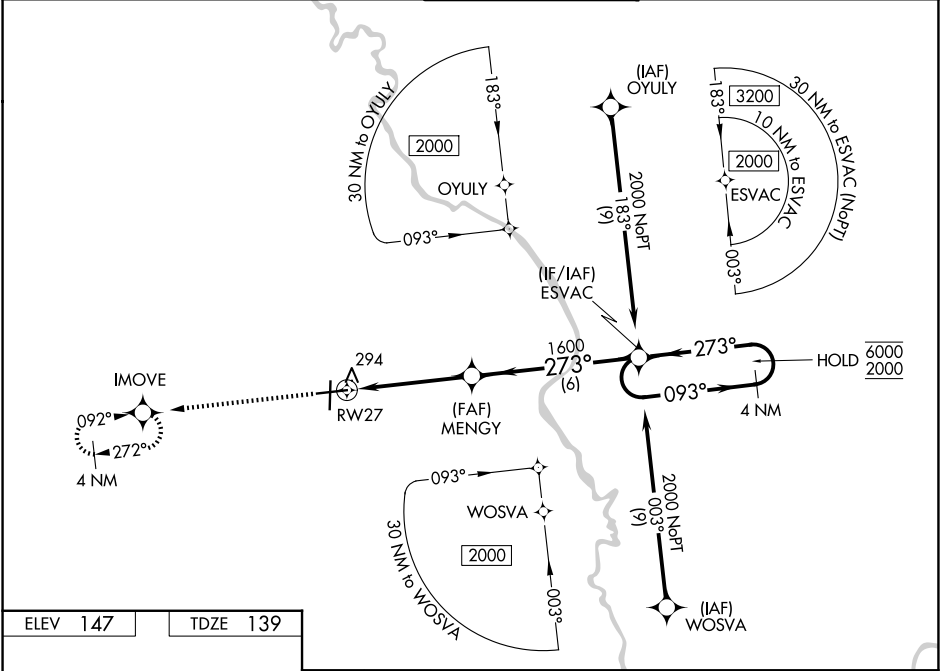

ELEV 147	TDZE 139	2200 IMOVE TWR 61 6502 X 150 6000 X 150 0.5% UP 0.4% UP 273°			
MIRL Rwy 1-19 HIRL Rwy 9-27 REIL Rwy 1, 19 and 27		2200 IMOVE MENGY 1600 1.2 NM to RW27 3.3 NM 6 NM ESVAC 4 NM Holding Pattern 093° 273° 6000 2000 GP 3.00° TCH 46			
CATEGORY	A	B	C	D	
LPV DA		389-1	250 (300-1)		
LNAV/VNAV DA		465-1	326 (400-1)		
LNAV MDA	560-1	421 (500-1)	560-1¼	421 (500-1¼)	
CIRCLING	640-1 493 (500-1)	660-1 513 (600-1)	900-2¼ 753 (800-2¼)	900-2½ 753 (800-2½)	