

WAAS CH 82539 W27A	APP CRS 272°	Rwy Ldg TDZE 629 Apt Elev 631
--	------------------------	---

AL-183 (FAA)


RNAV (GPS) RWY 27
GREENWOOD COUNTY (GRD)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C (14°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Laurens altimeter setting. DME/DME RNP-0.3 NA. Circling Rwy 5, 23 NA at night. Rwy 27 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Laurens altimeter setting: increase LPV DA to 932 feet and all visibilities 1/8 SM; increase LNAV/VNAV DA to 936 feet and all visibilities 1/8 SM; increase all MDA 60 feet and LNAV visibility Cats C and D 1/8 SM and Circling visibility Cats C and D 1/4 SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 1/8 SM and LNAV all Cats visibility to 1 SM. For inop ALS when using Laurens altimeter setting, increase LPV and LNAV/VNAV all Cats and LNAV Cats A and B visibility to 1 SM and LNAV Cats C and D visibility to 1 1/8 SM.

ODALS

MISSED APPROACH:
Climb to 2500 direct
MACER and hold.

ASOS 121.125	GREER APP CON ★ 120.6 350.2	UNICOM 122.975 (CTAF) 0
------------------------	---------------------------------------	--

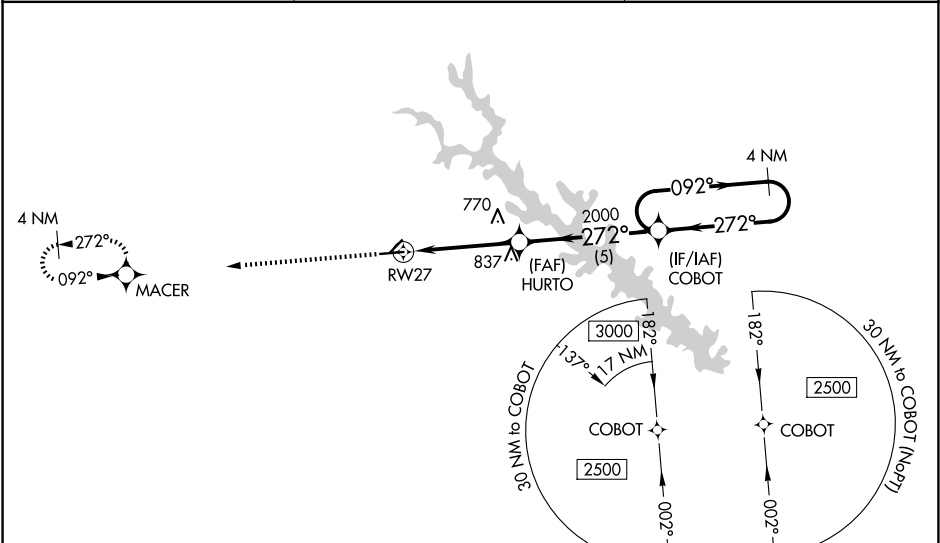

ELEV 631	TDZE 629
-----------------	-----------------

2500 ↑ MACER

*LNAV only.

HURTO

2000

272°

2000

1 NM 3.2 NM 5 NM

GP 3.00° TCH 53

4 NM COBOT Holding Pattern

092° → 2500

← 272°

CATEGORY	A	B	C	D
LPV DA	879-3/4 250 (300-3/4)			
LNAV/VNAV DA	883-3/4 254 (300-3/4)			
LNAV MDA	980-3/4 351 (400-3/4)	980-7/8 351 (400-7/8)		
CIRCLING	1080-1 449 (500-1)	1100-1 469 (500-1)	1320-2 689 (700-2)	1340-2 1/4 709 (800-2 1/4)

SE-2, 03 SEP 2026 to 01 OCT 2026

SE-2, 03 SEP 2026 to 01 OCT 2026