

LOC/DME I-PKI 111.95 Chan 56 (Y)	APP CRS 170°	Rwy Ldg TDZE 499 Apt Elev 501
--	------------------------	---

ILS or LOC RWY 17L
LOUISVILLE MUHAMMAD ALI INTL (SDF)



DME or RADAR required. RADAR required for procedure entry.


Simultaneous approach authorized. Circling Rwy 11 NA at night.
For inop ALS, increase S-LOC 17L Cat C/D visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct IIU VORTAC, continue climb-in-hold to 3000.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6
--------------------------	--	--	-------------------------------

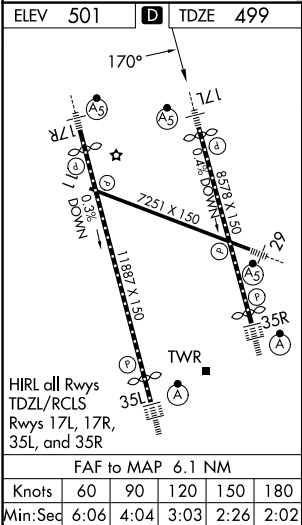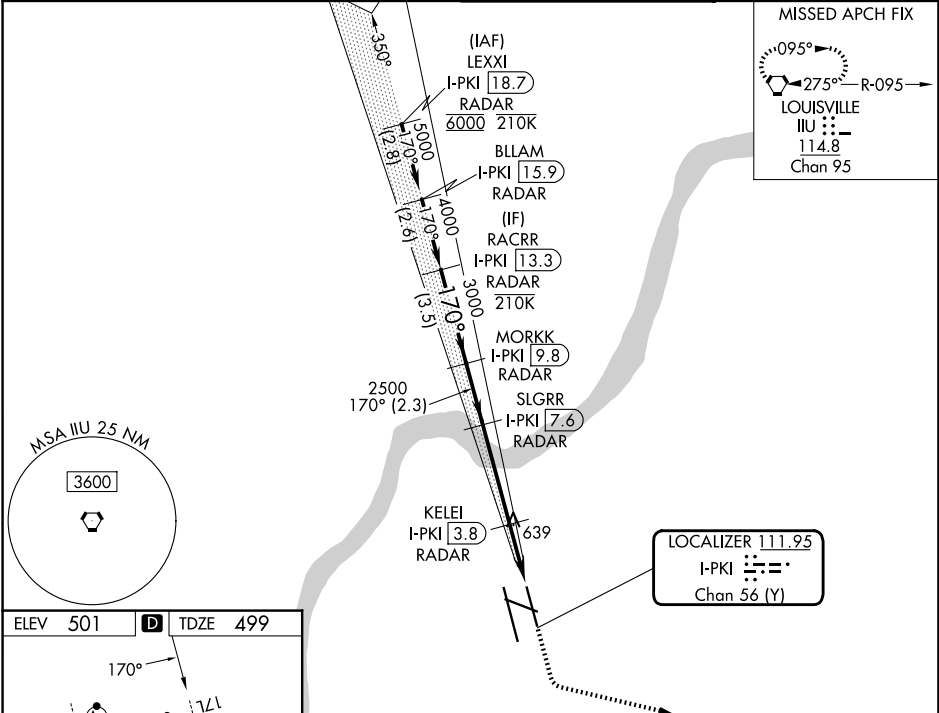

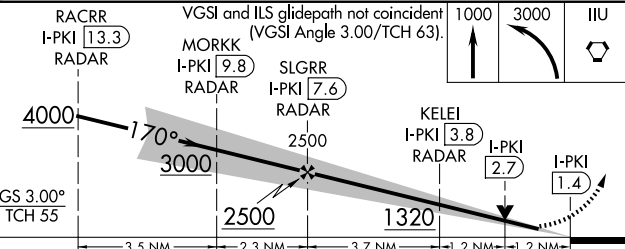 RACRR I-PKI 13.3 RADAR VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 63). MORKK I-PKI 9.8 RADAR SLGRR I-PKI 7.6 RADAR KELEI I-PKI 3.8 RADAR I-PKI 2.7 I-PKI 1.4 GS 3.00° TCH 55 4000 3000 2500 1320 3.5 NM 2.3 NM 3.7 NM 1.2 NM 1.2 NM 170° 1000 3000 IIU		CATEGORY		A		B		C		D			
S-ILS 17L		699/18 200 (200-½)											
S-LOC 17L		1000/24 501 (500-½)				1000/55 501 (500-1)							
CIRCLING		1040-1 539 (600-1)				1140-1 639 (700-1)				1160-1¾ 659 (700-1¾)		1400-3 899 (900-3)	

SE-1, 03 SEP 2026 to 01 OCT 2026

SE-1, 03 SEP 2026 to 01 OCT 2026