

APP CRS
350°

Rwy Ldg **10000**
TDZE **464**
Apt Elev **501**

RNAV (RNP) Z RWY 35L

LOUISVILLE MUHAMMAD ALI INTL (SDF⁷)

RNP AR APCH - GPS.

T


For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 4500.

ALS-F-2

A

MISSED APPROACH: Climb to 1000 then climbing left turn to 4000 direct DAMEN and hold.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6
--------------------------	--	--	-------------------------------

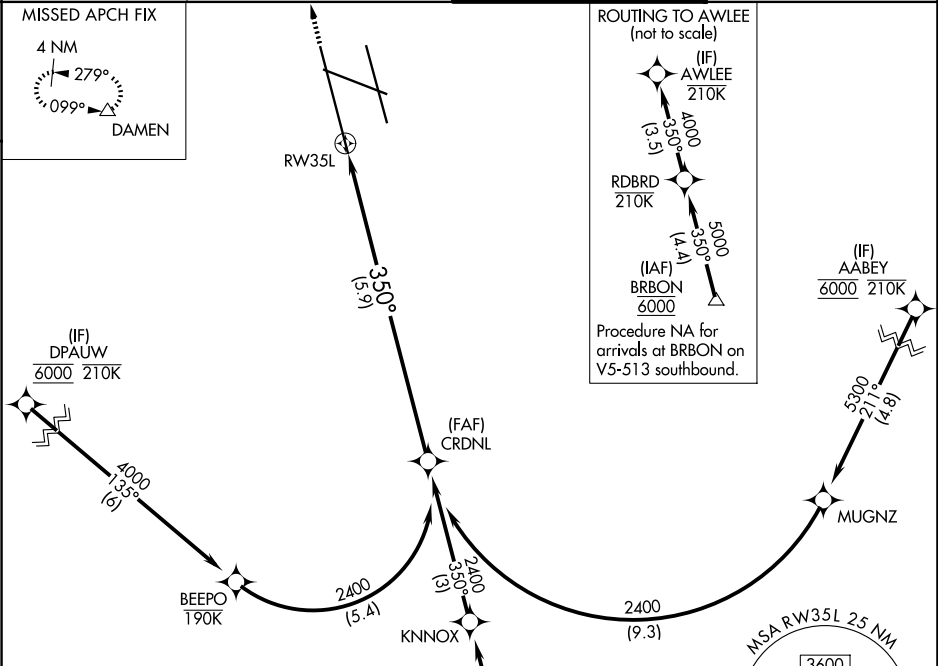

ELEV 501

D

TDZE 464

CATEGORY	A	B	C	D
RNP 0.11 DA		769/24	305 (300-½)	
RNP 0.30 DA		897/40	433 (400-¾)	

AUTHORIZATION REQUIRED