


WAAS CH 90101 W17B	APP CRS 170°	Rwy Ldg TDZE 499 Apt Elev 501
--	------------------------	---

RNAV (GPS) Y RWY 17L
LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP APCH - GPS. Simultaneous approach authorized. Circling Rwy 11 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000.	MALSRL 	MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct ILL VORTAC and hold, continue climb-in-hold to 3000.
---	---	--

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6
--------------------------	--	--	-------------------------------

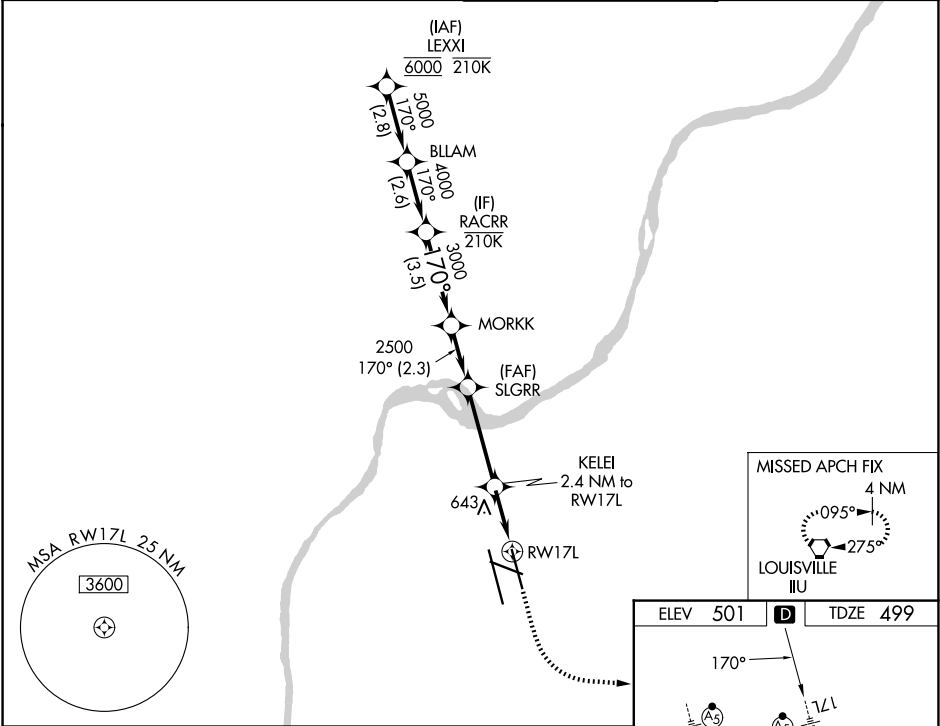

VGSI and RNAV glidepath not coincident (VGSI Angle 3.32/TCH 71).				1000	3000	ILL
RACRR				MORKK	SLGRR	KELEI
4000				3000	2500	1320
GP 3.00°				TCH 55		
3.5 NM				2.3 NM	3.7 NM	1.4 NM
A				B	C	D
CATEGORY	LPV DA			699/18 200 (200-½)		
CATEGORY	LNAV/VNAV DA			909/40 410 (500-¾)		
CATEGORY	LNAV MDA			920/24 421 (500-½) 920/40 421 (500-¾)		
CATEGORY	CIRCLING			1040-1 539 (600-1) 1140-1 639 (700-1) 1160-1¾ 659 (700-1¾) 1400-3 899 (900-3)		

ILL all Rwy's
TDZL/RCLS Rwy's 17L, 17R, 35L, and 35R

