RNAV (GPS) Y RWY 29

LOUISVILLE MUHAMMAD ALI INTL (SDF)

WAAS CH 93643 W29A	APP CRS 296°	Rwy Ldg 7250 TDZE 480 Apt Elev 501

RNP APCH - GPS.

Rwy 29 helicopter visibility reduction below RVR 4000 NA. Circling Rwy 11 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LPV all Cats visibility to RVR 4500 and LNAV Cats A/B visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 4000 direct ZUSAB and on track 269° to DAMEN and hold.

D-ATIS	LOUISVILLE APP CON	LOUISVILLE TOWER	GND CON
118.725	132.075 327.0	124.2 257.8	121.7 348.6

MISSED APCH FIX

4 NM 279° 099° DAMEN

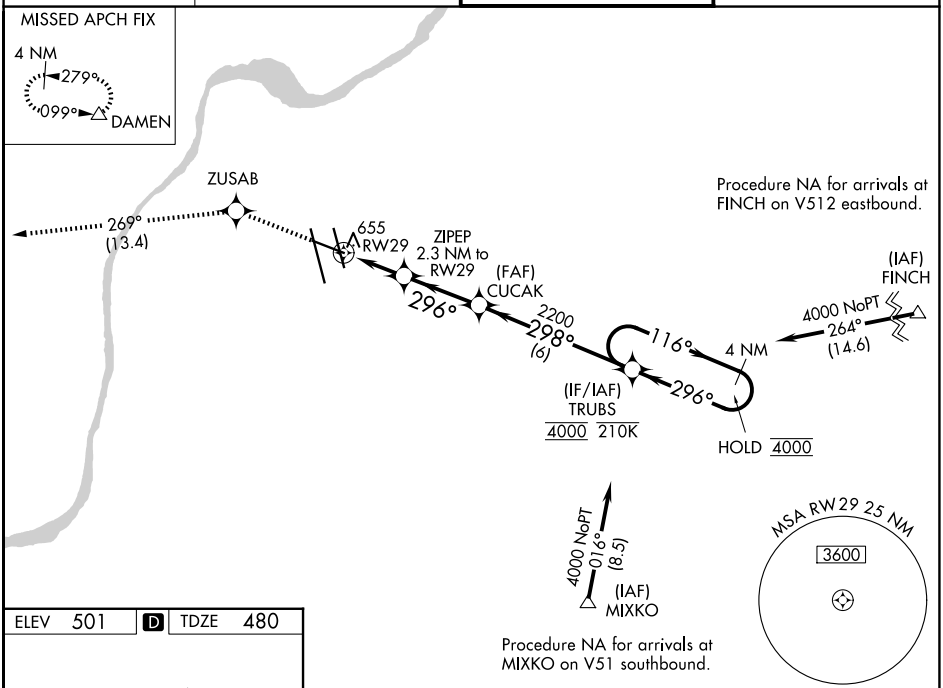

ELEV 501 D TDZE 480

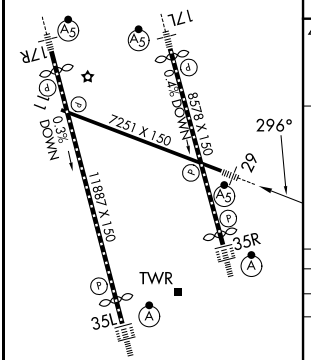

HIRL all Rwys
TDZL/RCLS Rwys 17L, 17R, 35L and 35R

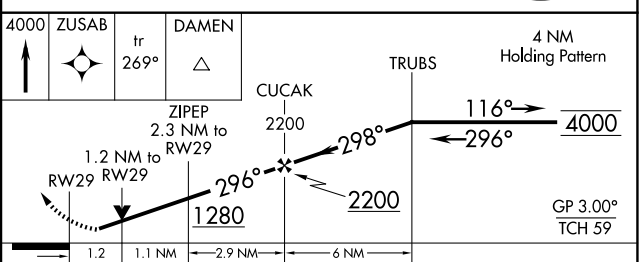

CATEGORY	A	B	C	D
LPV DA		761/40	281 (300-¾)	
LNAV/VNAV DA		920/40	440 (500-¾)	
LNAV MDA		920/40	440 (500-¾)	
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)

SE-1, 03 SEP 2026 to 01 OCT 2026
SE-1, 03 SEP 2026 to 01 OCT 2026