

MIAMI, FLORIDA

AL-257 (FAA)

26022

APP CRS	Rwy Ldg	12755
272°	TDZE	9
	Apt Elev	9

RNAV (RNP) Z RWY 27
MIAMI INTL (MIA)





RNP AR APCH-GPS.

Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below 8°C or above 54°C. For inop ALS, increase RNP 0.11 visibility to RVR 4500 all Cats.

MALSR

MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct BRBRA and hold, continue climb-in-hold to 4000.

D-ATIS 119.15	MIAMI APP CON 124.85 322.3	MIAMI TOWER 118.3 256.9	GND CON 121.8 (8L/8R/12/26L/26R) 127.5 (9/27/30) 348.6
------------------	-------------------------------	----------------------------	--

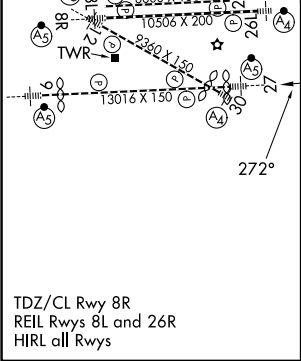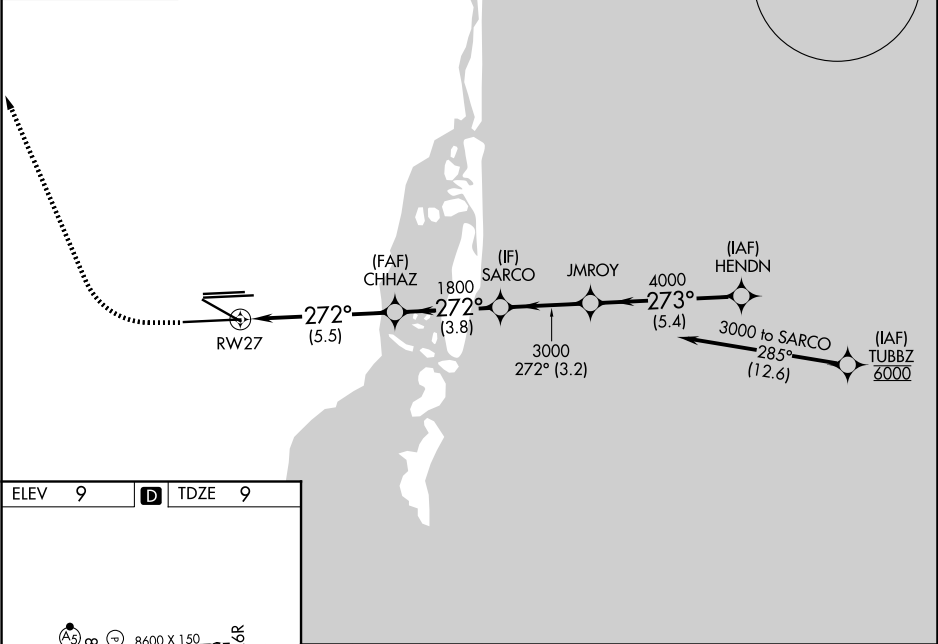

800	4000	BRBRA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).	HENDN
CHHAZ	SARCO	JMROY	273°	5000
1800	3000	4000	272°	
RW27	1800			
5.5 NM	3.8 NM	3.2 NM	5.4 NM	GP 3.00° TCH 55
CATEGORY	A	B	C	D
RNP 0.11 DA	327/24	318 (400-½)		
RNP 0.30 DA	405/35	396 (400-¾)		
AUTHORIZATION REQUIRED				

MIAMI, FLORIDA
Amdt 3 12AUG21

25°48'N-80°17'W

MIAMI INTL (MIA)

RNAV (RNP) Z RWY 27

SE-3, 03 SEP 2026 to 01 OCT 2026

SE-3, 03 SEP 2026 to 01 OCT 2026