


|                                        |                        |                                                   |             |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|
| WAAS<br>CH <b>42515</b><br><b>W13A</b> | APP CRS<br><b>126°</b> | Rwy Ldg<br>TDZE <b>590</b><br>Apt Elev <b>590</b> | <b>7032</b> |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|

RNAV (GPS) RWY 13  
QUAD CITIES INTL (MLI)


▼ Circling to Rwy 5 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Davenport altimeter setting and increase LPV DA to 955 feet, LNAV/VNAV DA to 1339 feet and all MDA 60 feet; increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cats C and D, and Circling Cats C and D visibility ¼ SM. Rwy 13 helicopter reduction below ¾ SM NA. VDP and Baro-VNAV NA when using Davenport altimeter setting.

MISSED APPROACH:  
Climb to 3000 direct ARACI and on track 195° to MIGNE and on track 275° to MZV VOR/DME and hold.

|                      |                                            |                                                |                         |                         |
|----------------------|--------------------------------------------|------------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>121.2</b> | QUAD CITY APP CON ★<br><b>125.95 257.8</b> | QUAD CITY TOWER ★<br><b>119.4(CTAF) 269.55</b> | GND CON<br><b>121.9</b> | UNICOM<br><b>122.95</b> |
|----------------------|--------------------------------------------|------------------------------------------------|-------------------------|-------------------------|

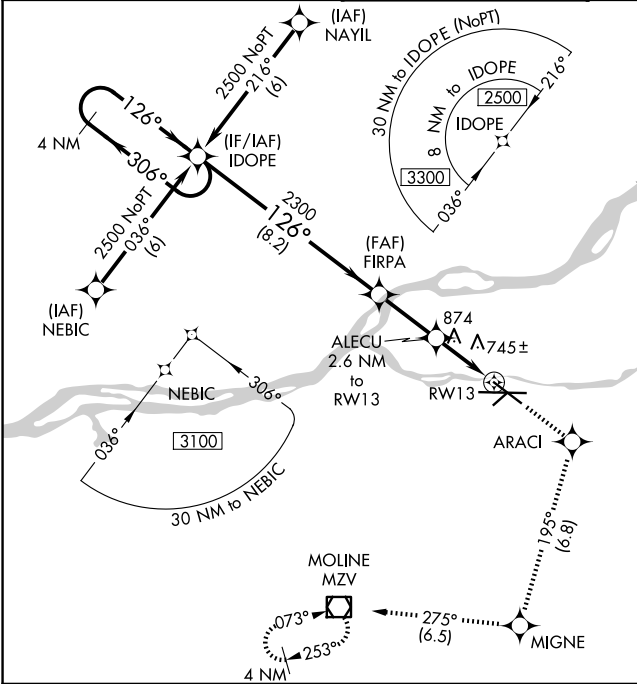

|                       |                       |        |                       |           |                         |                         |                         |            |  |            |  |         |  |          |  |
|-----------------------|-----------------------|--------|-----------------------|-----------|-------------------------|-------------------------|-------------------------|------------|--|------------|--|---------|--|----------|--|
| 4 NM Holding Pattern  |                       | IDOPE  |                       | 3000<br>↑ |                         | ARACI<br>✧              |                         | tr 195°    |  | MIGNE<br>✧ |  | tr 275° |  | MZV<br>◻ |  |
| 2500 ← 306°<br>126° → |                       | 126°   |                       | FIRPA     |                         | ALECU<br>2.6 NM to RW13 |                         | *LNAV only |  |            |  |         |  |          |  |
| GP 3.00°<br>TCH 48    |                       | 2300   |                       | *1460     |                         | *1.6 NM to RW13         |                         | RW13       |  |            |  |         |  |          |  |
|                       |                       | 8.2 NM |                       | 2.6 NM    |                         | 1                       |                         | 1.6        |  |            |  |         |  |          |  |
| CATEGORY              | A                     |        | B                     |           | C                       |                         | D                       |            |  |            |  |         |  |          |  |
| LPV DA                |                       |        | 908-1                 |           | 318 (400-1)             |                         |                         |            |  |            |  |         |  |          |  |
| LNAV/VNAV DA          |                       |        | 1292-2½               |           | 702 (800-2½)            |                         |                         |            |  |            |  |         |  |          |  |
| LNAV MDA              | 1140-1                |        | 550 (600-1)           |           | 1140-1½<br>550 (600-1½) |                         | 1140-1¾<br>550 (600-1¾) |            |  |            |  |         |  |          |  |
| CIRCLING              | 1140-1<br>550 (600-1) |        | 1200-1<br>610 (700-1) |           | 1320-2<br>730 (800-2)   |                         | 1420-2¾<br>830 (900-2¾) |            |  |            |  |         |  |          |  |

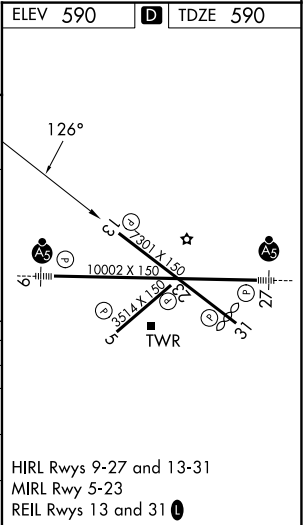

EC-3, 03 SEP 2026 to 01 OCT 2026

EC-3, 03 SEP 2026 to 01 OCT 2026